

imageRUNNER ADVANCE DX 4700 Series

MONO A3 MULTIFUNCTION DEVICES WITH ENHANCED CLOUD CONNECTIVITY THAT ALLOW YOU TO COLLABORATE SECURELY FROM ANYWHERE




Canon uniFLOW Online  
Outstanding Cloud Output Management Solution



New to the Line

MAIN CONFIGURATION OPTIONS

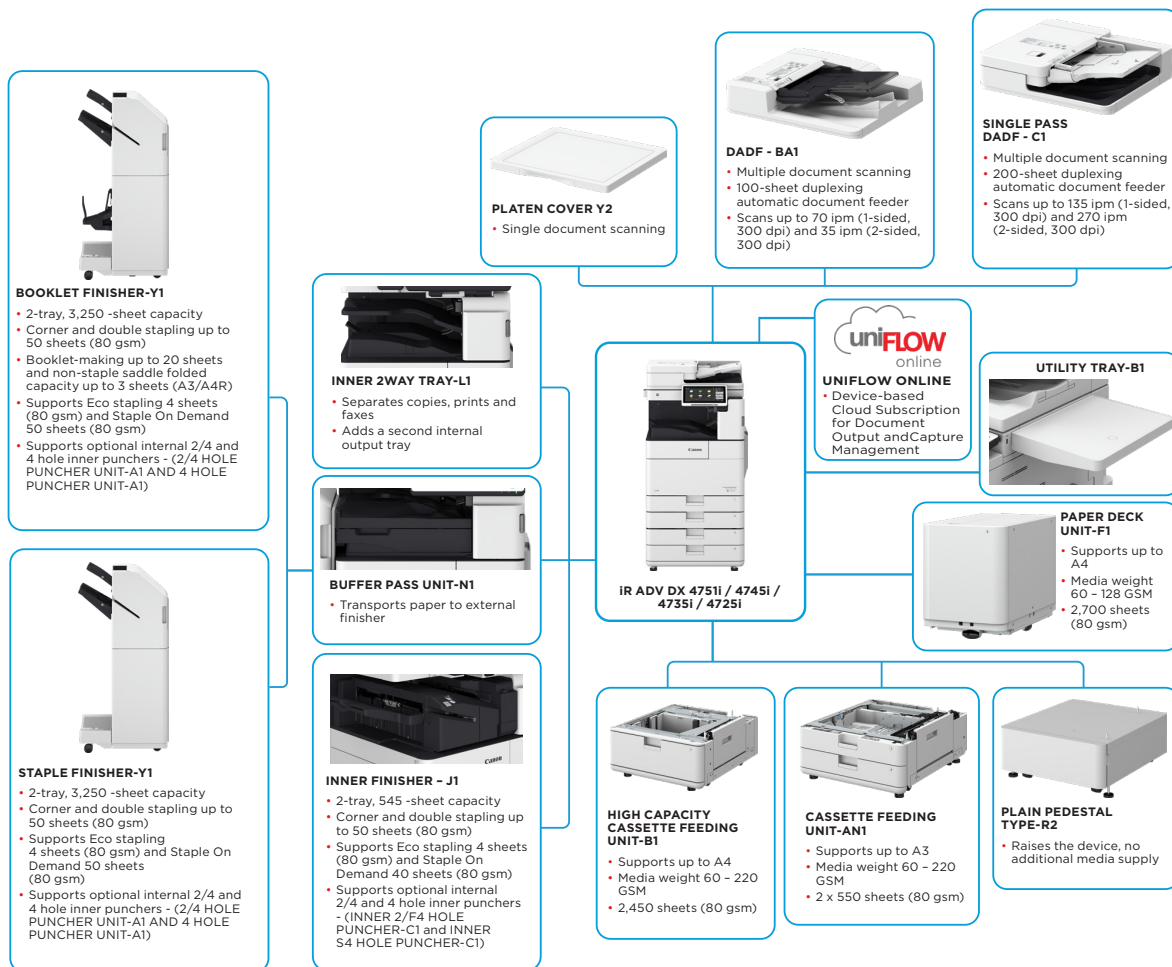

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online [product configurator](#).

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire IR ADVANCE DX portfolio.



# imageRUNNER ADVANCE DX 4751i

## TECHNICAL SPECIFICATIONS

## imageRUNNER ADVANCE DX 4700 Series

### MAIN UNIT

<b>Machine type</b>	A3 Monochrome Laser Multifunctional
<b>Core functions</b>	Print, Copy, Scan, Send, Store and Optional Fax
<b>Processor</b>	1.75GHz Dual Core Processor
<b>Control Panel</b>	Standard: 10.1" TFT LCD WSVGA Color Touch panel
<b>Memory</b>	Standard: 3.0 GB RAM
<b>Hard Disk drive</b>	Standard*: 320 GB (available disk space: 250 GB), Optional: 250GB, 1TB * A different initial HDD may be used.
<b>Mirroring Hard Disk Drive</b>	Optional
<b>Interface Connection</b>	<b>NETWORK</b> Standard: 100Base-T/100Base-TX/10Base-T, Wireless LAN(IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Low Energy <b>OTHERS</b> Standard: USB 2.0(Host) x1, USB 3.0(Host) x1, USB 2.0(Device) x1 Optional: Serial interface, Copy Control Interface

<b>Paper Supply Capacity (A4, 80gsm)</b>	Standard: 1,200 sheets 100-sheet Multi-purpose tray x 1 550-sheet cassette x 2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-B1 and Paper Deck Unit-F1)
--	--

<b>Paper output capacity (A4, 80gsm)</b>	Standard: 250 Sheets Maximum: 3,350 Sheets (with Buffer Pass-N1 + Staple Finisher-Y1 or Booklet Finisher-Y1)
--	--

<b>Finishing capabilities</b>	Standard: Collate, Group With options : Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand
-------------------------------	--

<b>Supported media types</b>	Multi-purpose tray: Thin, Plain, Heavy, Color, Recycled, Pre-punched, Transparency, Tracing, Label, Bond, Envelope Paper Cassette (Upper/Lower): Thin, Plain, Heavy, Color, Recycled, Pre-punched
------------------------------	--

<b>Supported media sizes</b>	Multi-purpose tray: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 98.0 x 148.0 mm to 297.0 x 431.8 mm Free Size: 98.0 x 148.0 mm to 297.0 x 431.8 mm Envelope: COM10 No.10, Monarch, DL, ISO-C5 Custom size envelope: 98.0 x 148.0mm to 297.0 x 431.8mm Upper Cassette: Standard size: A4, A4R, A5R, B4, B5, B5R Custom size: 139.7 x 182.0 mm to 297.0 x 390.0 mm Lower Cassette: Standard size: A3, A4, A4R, A5R, B4, B5, B5R Custom size: 139.7 x 182.0 mm to 297.0 x 431.8 mm Envelope*: COM10 No.10, Monarch, DL, ISO-C5 * Envelope Feeder Attachment-D1 is required.
------------------------------	--

<b>Supported media weights</b>	Multi-purpose tray: 52 to 220 gsm *Thin (52 to 59gsm): vertical grain paper feed only Paper Cassettes (Upper/Lower): 60 to 220 gsm Duplex: 60 to 105 gsm
--------------------------------	---

<b>Warm-up Time</b>	Quick startup mode: 4 seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 Seconds or Less From Power On: 24 seconds or less* *Time from device power-on, until copy ready (not print reservation)
---------------------	---

<b>Dimensions (W x D x H)</b>	With Platen Cover-Y2: 608 x 713 x 822 mm With Single Pass DADF-C1: 608 x 722 x 932 mm With DADF-BA1: 608 x 719 x 926 mm
-------------------------------	---

<b>Installation Space(W x D)</b>	Basic: 1,116 x 1,160 mm (with Platen Cover Type Y2 + Multi-purpose tray open/extension tray extended + Paper Cassette open) 1,116 x 1,169 mm (with Single Pass DADF-C1 + Multi-purpose tray open/extension tray extended + Paper Cassette open) 1,116 x 1,166 mm (with DADF-BA1 + Multi-purpose tray open/extension tray extended + Paper Cassette open) Fully Configured: 1,811 x 1,169 mm (with Single Pass DADF-C1 + Paper Deck Unit-F1 + Booklet Finisher-Y1 with extension tray extended and Saddle unit drawn) 1,811 x 1,166 mm (with DADF-BA1 + Paper Deck Unit F1 + Booklet Finisher-Y1 with extension tray extended and Saddle unit drawn)
----------------------------------	---

<b>Weight</b>	With Platen Cover Y2: Approx. 75.0 kg including toner With Single Pass DADF-C1 : Approx. 87.9 kg including toner With DADF-BA1 : Approx. 81.4 kg including toner
---------------	--

### PRINT SPECIFICATIONS

<b>Print Speed</b>	iR-ADV DX 4751i: Up to 51ppm (A4), Up to 37ppm (A4R), Up to 25ppm (A3), Up to 20 ppm (A5R) iR-ADV DX 4745i: Up to 45ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4735i: Up to 35ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4725i: Up to 25ppm (A4), Up to 17ppm (A4R), Up to 15ppm (A3), Up to 17ppm (A5R)
--------------------	--

<b>Print Resolution (dpi)</b>	1,200x 1,200
-------------------------------	--------------

<b>Page description languages</b>	Standard: UFR II, PCL6, Optional: Adobe®PostScript®3™
-----------------------------------	--

<b>Direct Print</b>	Supported file types: TIFF, JPEG, PDF, EPS, and XPS
---------------------	---

### Printing from mobile and cloud

<b>Fonts</b>	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2 PS fonts: 136 Roman *1: Optional PCL International Font Set-A1 is required. *2: Optional Barcode Printing Kit-D1 is required.
--------------	--

<b>Print Features</b>	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
-----------------------	--

<b>Operating System</b>	UFR II: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PCL: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019 PS: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PPD: Windows® 7/8.1/10, Mac OS X (10.9 or later) McAfee Embedded Control Software As of July,2019.
-------------------------	--

<b>COPY SPECIFICATIONS</b>	
----------------------------	--

<b>Copy Speed</b>	iR-ADV DX 4751i: Up to 51ppm (A4), Up to 37ppm (A4R), Up to 25ppm (A3), Up to 20 ppm (A5R) iR-ADV DX 4745i: Up to 45ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4735i: Up to 35ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4725i: Up to 25ppm (A4), Up to 17ppm (A4R), Up to 15ppm (A3), Up to 17ppm (A5R)
-------------------	---

<b>First-Copy-Out Time (A4)</b>	iR-ADV DX 4751i: Approx. 3.7 seconds or less iR-ADV DX 4745i: Approx. 3.8 seconds or less iR-ADV DX 4735i: Approx. 3.8 seconds or less iR-ADV DX 4725i: Approx. 5.2 seconds or less
---------------------------------	--

<b>Copy resolution (dpi)</b>	600 x 600
------------------------------	-----------

<b>Multiple Copies</b>	Up to 9,999 copies
------------------------	--------------------

<b>Copy Density</b>	Automatic or Manual (9 Levels)
---------------------	--------------------------------

<b>Magnification</b>	Variable zoom: 25% - 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%(1:1), 141%, 200%, 400%
----------------------	---

<b>Copy Features</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Reserved copy, Copy Sample
----------------------	--

<b>SCAN SPECIFICATIONS</b>	
----------------------------	--

<b>Selectable type</b>	Single Pass DADF-C1* or DADF-BA1 [2-sided to 2-sided (Automatic with DADF)] * Detect Feeder Multi Sheet Feed is supported. DADF: Duplexing Automatic Document Feeder
------------------------	--

<b>Document Feeder Paper Capacity (80 gsm)</b>	Single Pass DADF-C1: up to 200 sheets DADF-BA1: up to 100 sheets
--	---

<b>Acceptable originals and weights</b>	Platen: Sheet, Book, and 3-Dimensional objects Document Feeder media weight: Single Pass DADF-C1*: 1-sided scanning: 38 to 220 gsm 2-sided scanning: 38 to 220 gsm *An acceptable weights of A6R or smaller is 50 to 220gsm. DADF-BA1: 1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)
---	--

<b>Supported media sizes</b>	Platen: max. scanning size up to 297.0 x 431.8 mm Document Feeder media size: Single Pass DADF-C1: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R, Custom size: 70.0 x 139.7 mm to 304.8 x 431.8 mm DADF-BA1: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6, Custom size: 139.7 x 128 mm to 297.0 x 431.8 mm
------------------------------	--

<b>Scan Speed (ipm: BW/CL; A4)</b>	Single Pass DADF-C1: 1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy) 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy) DADF-BA1: 1-sided Scanning: 70/70 (300 x 300 dpi, send), 51/51 (600 x 600 dpi, copy) 2-sided Scanning: 35/35 (300 x 300 dpi, send), 25.5/25.5 (600 x 600 dpi, copy)
------------------------------------	--



# imageRUNNER ADVANCE DX 4751i

## TECHNICAL SPECIFICATIONS

## imageRUNNER ADVANCE DX 4700 Series

<b>Scan Resolution (dpi)</b>	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600	<b>Network Security</b>	TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), Communication Line Separation (G3 FAX, USB Port, Advanced Space, Scan and Send -Virus Concerns for E-mail Reception)
<b>Pull Scan Specifications</b>	Color Network ScanGear2, For both TWAIN and WIA Supported OS: Windows 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server 2016	<b>Device Security</b>	Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), IEEE2600.2 (Common Criteria Certification) (TBD)
<b>Scan Method</b>	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud (uniFLOW)	<b>Device Management and Auditing</b>	Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting
<b>SEND SPECIFICATIONS</b>		<b>ENVIRONMENTAL SPECIFICATIONS</b>	
<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax	<b>Operating Environment</b>	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
<b>Address Book</b>	LDAP (2,000)/Local(1,600)/Speed dial(200)	<b>Power source</b>	220-240V, 50-60Hz, 5.6A
<b>Send resolution (dpi)</b>	Push: up to 600 x 600 Pull: up to 600 x 600	<b>Power consumption</b>	Maximum: Approx. 1,500 W Copying (with DADF continuous scan): IR-ADV DX 4751i: 990 W <sup>*1</sup> IR-ADV DX 4745i: 975 W <sup>*1</sup> IR-ADV DX 4735i: 875 W <sup>*1</sup> IR-ADV DX 4725i: 653 W <sup>*1</sup>
<b>Communication protocol</b>	File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV E-mail/l-Fax: SMTP, POP3		Standby: Approx. 38 W <sup>*1</sup> Sleep mode: Approx. 0.9 W <sup>*2</sup> <sup>*1</sup> Reference value: measured one unit <sup>*2</sup> 0.9 sleep mode is not available in all circumstances due to certain settings.
<b>File Format</b>	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)		Typical Electricity Consumption (TEC)* : IR-ADV DX 4751i: 0.72 kWh IR-ADV DX 4745i: 0.63 kWh R-ADV DX 4735i: 0.53 kWh IR-ADV DX 4725i: 0.35 kWh <sup>*As per USA Energy Star 3.0</sup>
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages		<b>Sound Power Level (LWA m<sup>3</sup>)</b> Active (1-sided) IR-ADV DX 4751i: 6.7 B, Kv 0.3 B IR-ADV DX 4745i: 6.6 B, Kv 0.3 B IR-ADV DX 4735i: 6.5 B, Kv 0.3 B IR-ADV DX 4725i: 6.3 B, Kv 0.3 B <sup>*Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)</sup>
<b>FAX SPECIFICATIONS</b>		<b>Noise levels</b>	<b>Sound Pressure (LpAm)</b> Bystander's position: Active(BW) (1-sided): IR-ADV DX 4751i: 54 dB* IR-ADV DX 4745i: 51 dB* IR-ADV DX 4735i: 51 dB* IR-ADV DX 4725i: 50 dB* Stand-by IR-ADV DX 4751i: 21 dB* IR-ADV DX 4745i: 21 dB* IR-ADV DX 4735i: 20 dB* IR-ADV DX 4725i: 20 dB* <sup>*Reference value: Measured only one unit with ISO7779, described with ISO9296 (2017)</sup>
<b>Maximum Number of Connection Lines</b>	2		
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps		
<b>Compression Method</b>	MH, MR, MMR, JBIG		
<b>Resolution (dpi)</b>	400x400 (Ultra Fine), 200x400 (Super Fine), 200x200 (Fine), 200x100 (Normal)		
<b>Sending/Receiving Size</b>	Sending: A3, A4, A4R, A5 <sup>*1</sup> , A5R <sup>*1</sup> , B4, B5 <sup>*2</sup> , B5R <sup>*1</sup> Receiving: A3, A4, A4R, A5R, B4, B5, B5R <sup>*1</sup> Sent as A4 <sup>*2</sup> Sent as B4 short		
<b>FAX memory</b>	Up to 30,000 pages (2,000 jobs)		
<b>Speed dials</b>	Max. 200		
<b>Group dials/destinations</b>	Max. 199 dials		
<b>Sequential broadcast</b>	Max. 256 addresses		
<b>Memory backup</b>	Yes		
<b>Fax Features</b>	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log		
<b>STORE SPECIFICATIONS</b>		<b>Standards</b>	Blue Angel
<b>Mail Box (Number supported)</b>	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 30,000 Pages (2,000 jobs) Stored	<b>CONSUMABLES</b>	
<b>Advanced Space</b>	Communication Protocol: SMB or WebDAV Supported Client PC: Windows <sup>®</sup> 8.1/10 Concurrent Connections (Max.): SMB:64, WebDAV:3	<b>Toner Cartridges</b>	C-EXV 53 TONER BK C-EXV 53 TONER BK: 42,100 pages
<b>Advanced Space available disc space</b>	Standard:16 GB (With option: max. 480GB)	<b>Toner</b>	
<b>Advanced Space Features</b>	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore	<b>(Estimated Yield @ 6% Coverage)</b>	
<b>SECURITY SPECIFICATIONS</b>		<b>SOFTWARE AND PRINTER MANAGEMENT</b>	
<b>Authentication and Access Control</b>	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)	<b>Tracking and reporting</b>	For detailed information please visit our website <a href="https://www.canon-europe.com/business/">https://www.canon-europe.com/business/</a>
<b>Document Security</b>	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print <sup>™</sup> ), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle <sup>®</sup> Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Box Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) <sup>*1</sup> Requires uniFLOW Online / uniFLOW	<b>Remote management tools</b>	Universal Login Manager (ULM) <a href="#">uniFLOW Online Express<sup>™</sup></a> <sup>*For more information, please refer to uniFLOW Online Express/uniFLOW Online Technical Datasheets</sup>
		<b>Scanning software</b>	iW Management Console eMaintenance Content Delivery System
		<b>Optimisation tools</b>	Network ScanGear Canon Driver Configuration Tool NetSpot Device Installer
		<b>Platform</b>	MEAP (Multifunctional Embedded Application Platform)
		<b>Document Administration</b>	Kofax Power PDF (Optional)

# imageRUNNER ADVANCE DX 4751i

## TECHNICAL SPECIFICATIONS

## imageRUNNER ADVANCE DX 4700 Series

### PAPER SUPPLY OPTIONS

#### Cassette Feeding Unit-AN1

Paper Capacity: 550 sheets x 2 (80 gsm)  
 Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched  
 Paper Size: A3, A4, A4R, A5R, B4, B5R, B5  
 Custom size: 139.7 x 182.0mm to 297.0 x 390.0 mm  
 Paper Weight: 60 to 220 gsm  
 Power Source: From the Main Unit  
 Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit)  
 Weight: Approx. 23.5 kg

#### High Capacity Cassette Feeding Unit-B1

Paper Capacity: 2,450 sheets (80 gsm)  
 Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched  
 Paper Size: A4  
 Paper Weight: 60 to 220 gsm  
 Power Source: From the Main Unit  
 Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit)  
 Weight: Approx. 28.0 kg

#### Paper Deck Unit-F1

Tray Capacity: 2,700 sheets (80 gsm)  
 Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched  
 Paper Size: A4, B5  
 Paper Weight: 60 to 128 gsm  
 Power Source: From the Main Unit  
 Dimensions (W x D x H): 344 x 630 x 440 mm (attached to the main unit)  
 Weight: Approx. 31.0 kg

### OUTPUT OPTIONS\*

#### Inner 2Way Tray-L1

\*Paper capacity may vary with different of paper type/size.

Tray Capacity (with 80 gsm paper)  
 Upper tray: A4, A5, A5R, A6R, B5, 100 sheets  
 A3, A4R, B4, B5R: 50 Sheets  
 Lower tray: A4, B5: 250 sheets  
 A3, A4R, A5, A5R, A6R, B4, B5R: 100 sheets  
 Paper Weight: 52 to 220 gsm  
 Dimensions (W x D x H): 426 x 413 x 109 mm  
 Weight: 0.6 kg

#### Inner Finisher-J1

Tray Capacity (with 80 gsm paper)  
 Upper Tray: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 45 sheets  
 Lower Tray: A4, A5R, B5: approx. 500 sheets,  
 A3, A4R, B4, B5R: approx. 250 sheets  
 Envelope: 10 sheets  
 Staple Position: Corner, Double  
 Staple Capacity:  
 A4, B5: 50 sheets (52 to 90 gsm)  
 A3, A4R, B4: 30 sheets (52 to 90 gsm)  
 Eco Staple:  
 A3, A4, B4, B5: 5 sheets (52 to 64 gsm)  
 4 sheets (65 to 81.4 gsm)  
 3 sheets (81.5 to 105 gsm)  
 Staple On Demand: approx. 40 sheets (80 gsm)  
 Dimensions (W x D x H): 604 x 525 x 205 mm (when the extension tray is extended)  
 Weight: Approx. 7.3 kg

#### Staple Finisher-Y1

(Requires Buffer Pass Unit-N1)  
 Tray Capacity (with 80 gsm paper):  
 Upper Tray: A4, A5, A5R, A6R, B5: 250 sheets,  
 A3, A4R, B4, B5R: 125 sheets,  
 Lower Tray: A4, A5, A5R, B5: 3,000 sheets,  
 A3, A4R, B4, B5R: 1,500 sheets,  
 A6R: up to 250 sheets  
 Envelope: No.10 COM10, DL, ISO-C5: 100 sheets,  
 Monarch: 30 sheets  
 Paper Weight: 52 to 220 gsm  
 Staple Position: Corner, Double  
 Staple Capacity:  
 A4, B5: 50 sheets (52 to 90 gsm)  
 A3, A4R, B4: 30 sheets (52 to 90 gsm)  
 Eco Staple:  
 A3, A4: 5 sheets (52 to 64 gsm)  
 4 sheets (65 to 81.4 gsm)  
 3 sheets (82 to 105 gsm)  
 Staple On Demand: 50 sheets (52 to 90 gsm)  
 Power Supply: from the main unit  
 Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended)  
 Weight: Approx. 31 kg

#### Booklet Finisher-Y1

(Requires Buffer Pass Unit-N1)  
 (Includes the above Staple Finisher-Y1 basic staple specifications)  
 Saddle Stitch paper size: A3, A4R, B4  
 Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet)  
 Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm)  
 Power Supply: from the main unit  
 Dimensions (W x D x H): 637 mm x 623 mm x 1,142 mm (when the extension tray is extended)  
 Weight: Approx. 57 kg

#### Inner 2/F4 Hole Puncher-C1

(Requires the Inner Finisher-J1)  
 Two or Four Holes  
 Acceptable Punch Paper Weight: 52 to 220 gsm  
 Acceptable Punch Paper Size:  
 Two holes A3, A4, A4R, B4, B5, B5R  
 Four holes A3, A4  
 Power Source: from the Finisher

#### Inner S4 Hole Puncher-C1

(Requires the Inner Finisher-J1)  
 Four Holes  
 Acceptable Punch Paper Weight: 52 to 220 gsm  
 Acceptable Punch Paper Size: Four holes A3, A4, A4R, B4, B5, B5R  
 Power Source: from the Finisher

#### 2/4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)  
 Two or Four Holes  
 Acceptable Punch Paper Weight: 52 to 220 gsm  
 Acceptable Punch Paper Size:  
 Two holes A3, A4, A4R, A5, B4, B5, B5R  
 Four holes A3, A4  
 Power Source: from the Finisher

#### 4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)  
 Four Holes  
 Acceptable Punch Paper Weight: 52 to 220 gsm  
 Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R  
 Power Source: from the Finisher

### HARDWARE ACCESSORIES

#### Card Readers

Various card readers available e.g. MiCard Plus.  
 Please contact local Canon Office for more details.  
 Copy Card Reader-F1  
 Copy Card Reader Attachment-B7

#### Others

Platen Cover-Y2  
 Utility Tray-B1  
 Envelope Feeder Attachment-D1  
 Numeric Keypad-A1

### SECURITY OPTIONS

#### Data Security

HDD Mirroring Kit-J1  
 2.5inch/250GB HDD-N1  
 2.5inch/1TB HDD-P1

### SYSTEM AND CONTROLLER OPTIONS

#### Print Accessories

PCL International Font Set-A1  
 PS Printer Kit-BG1

#### Barcode Printing

Barcode Printing Kit-D1

#### System Accessories

Copy Control Interface Kit-A1  
 Serial Interface Kit-K3  
 Connection Kit-A2 for Bluetooth LE  
 NFC Kit-E1

#### Fax Accessories

Super G3 FAX Board-BF1  
 Super G3 2nd Line Fax Board-BF1  
 Remote Fax Kit-A1  
 IP FAX Expansion Kit-B1

### OTHER OPTIONS

#### Accessibility Accessories

ADF Access Handle-A1  
 Voice Guidance Kit-G1  
 Voice Operation Kit-D1  
 Staple-P1  
 Staple Cartridge-Y1

### Software & Solutions



### Certifications and compatibility



Canon Ireland  
 3006 Lake Drive  
 Citywest, Saggart  
 Co. Dublin, Ireland  
 Telephone No: 01 2052400  
 Facsimile No: 01 2052525  
 canon.ie

Canon (UK) Ltd  
 5 The Square  
 Stockley Park  
 Uxbridge  
 UB11 1ET  
 Tel: 01895 648 000  
 www.canon.co.uk

Canon Inc.  
 canon.com  
 Canon Europe  
 canon-europe.com  
 English edition  
 © Canon Europa N.V., 2020

