


imageRUNNER ADVANCE DX C5700 Series

STREAMLINE BUSINESS EFFICIENCY WITH SMART, COLOUR A3 MULTIFUNCTION DEVICES



MAIN CONFIGURATION OPTIONS

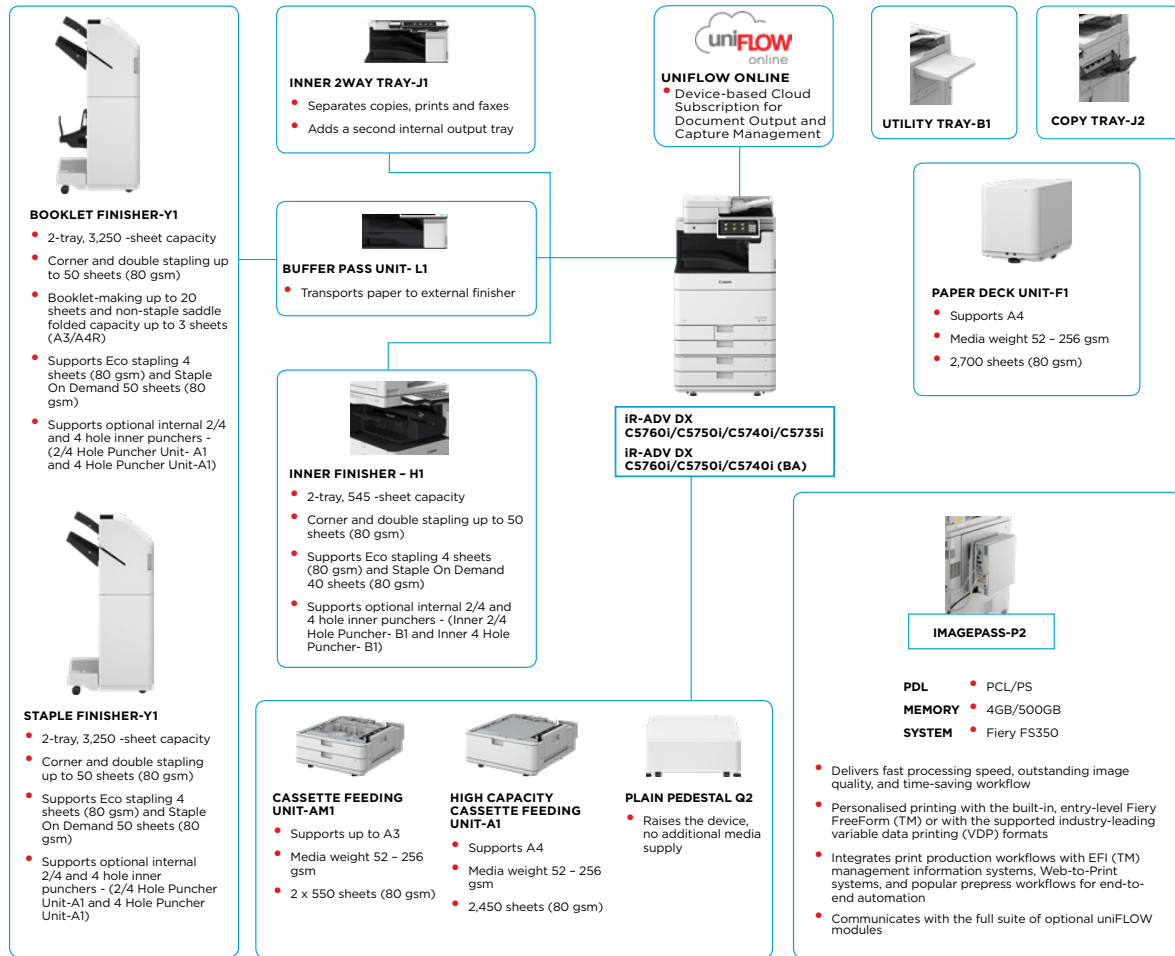

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire IR ADVANCE DX portfolio.

imageRUNNER ADVANCE DX C5750i

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX C5700 Series

MAIN UNIT		Direct Print	Supported file types: PDF, EPS, TIFF/JPEG, and XPS
Machine type	A3 Color Laser Multifunctional	Printing from mobile and cloud	AirPrint, Mopria, Google Cloud Print, Canon PRINT Business and uniFLOW Online
Core functions	Print, Copy, Scan, Send, Store and Optional Fax		A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
Processor	1.75GHz Dual Core Processor		PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT J/K/S/T* (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts* * Optional PCL International Font Set-A1 is required. * Optional Barcode Printing Kit-D1 is required.
Control Panel	10.1" TFT LCD WSVGA Color Touch panel	Fonts	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Memory	Standard: 4.0GB RAM	Print Features	UFRiL: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later) PCL: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019 PS: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later) PPD: Windows® 7/8.1/10, Mac OS X(10.9 or later) McAfee Embedded Control Software As of Feb 2020
Hard Disk drive	Standard*: 320GB (available disk space: 250GB), Optional: 250GB, 1TB *A different initial HDD may be used.	Operating System	
Mirroring Hard Disk Drive	Optional	COPY SPECIFICATIONS	
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n); Optional: NFC, Bluetooth Low Energy OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Serial Interface, Copy Control Interface	Copy Speed (BW/CL)	iR-ADV DX C5760i up to 60 ppm (A4, A5, A5R, A6R), up to 32 ppm (A3), up to 36 ppm (A4R) iR-ADV DX C5750i up to 50 ppm (A4, A5, A5R, A6R), up to 27 ppm (A3), up to 30 ppm (A4R) iR-ADV DX C5740i up to 40 ppm (A4, A5, A5R, A6R), up to 22 ppm (A3), up to 24 ppm (A4R) iR-ADV DX C5735i up to 35 ppm (A4, A5, A5R, A6R), up to 18 ppm (A3), up to 23 ppm (A4R) iR-ADV DX C5760i: Approx. 2.9/4.5 seconds or less iR-ADV DX C5750i: Approx. 3.5/5.2 seconds or less iR-ADV DX C5740i: Approx. 4.1/6.1 seconds or less iR-ADV C5735i: Approx. 4.9/7.4 seconds or less
Paper Supply Capacity (A4, 80gsm)	Standard: 1200 sheets 100-sheet multi-purpose tray x 1 550-sheet cassettes x 2, Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-A1 + Paper Deck Unit-F1)	First-Copy-Out Time (A4, BW/CL)	600 x 600 Up to 999 copies Automatic or Manual (9 Levels) Variable zoom: 25% to 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%(1:1), 141%, 200%, 400%
Paper output capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 3,450 Sheets (with Staple Finisher-Y1 or Booklet Finisher-Y1 and Copy Tray-J2)	Copy resolution (dpi)	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
Finishing capabilities	Standard: Collate, Group With Options: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand	Multiple Copies	
Supported Media Types	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Coated, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Tab, Envelope Paper Cassette (Upper/Lower): Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* *Envelope Feeder Attachment (standard) is required.	Copy Density	
Supported Media Sizes	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Free Size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Envelopes: COM 10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 98.4 mm to 320.0 x 457.2 mm Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 98.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: COM10 No.10, DL, ISO-C5 Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 182.0 mm to 304.8 x 457.2 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5	Magnification	
Supported media weights	Multi-purpose tray: 52 to 300 gsm Paper Cassette (Upper/Lower): 52 to 256 gsm Duplex: 52 to 220 gsm	Copy Features	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Detect Feeder Multi Sheet Feed is supported. up to 200 Sheets
Warm-up Time	Quick Startup Mode: 4 Seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 Seconds or Less From Power On: 10 Seconds or less* *Time from device power-on, until copy ready (not print reservation).	Supported media sizes	Platen: Sheet, Book, and 3-Dimensional Objects Document Feeder media weight: 1-sided scanning: 38 to 220 gsm (BW, CL) 2-sided scanning: 38 to 220 gsm (BW, CL) *An acceptable weights of A6R or smaller is 50 to 220gsm.
Dimensions (W x D x H)	iR-ADV DX C5760i/C5750i/C5740i/C5735i: 620 x 722 x 937 mm iR-ADV DX C5760i/C5750i/C5740i (BA models): 620 x 860 x 937 mm	Scan Speed (ipm: BW/CL; A4)	Platen scanning size: up to 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 70.0 x 139.7 mm to 304.8 x 431.8 mm
Installation Space(W x D)	iR-ADV DX C5760i/C5750i/C5740i/C5735i: Basic: 1,083 x 1,162 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 1,866 x 1,162 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open) iR-ADV DX C5760i/C5750i/C5740i (BA models): Basic: 1,083 x 1,300 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 1,866 x 1,300 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open)	Scan Resolution (dpi)	1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy), 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy)
Weight	iR-ADV DX C5760i/C5750i/C5740i/C5735i: Approx. 143 kg including toner [iR-ADV DX C5760i/C5750i/C5740i (BA models): Approx. 145 kg including toner]	Pull Scan Specifications	Color Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server 2016 Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online)
PRINT SPECIFICATIONS		Scan Method	
Print Speed (BW/CL)	iR-ADV DX C5760i 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60/5 ppm (A5R), 60/5 ppm (A6R) iR-ADV DX C5750i 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50/4 ppm (A5R), 50/4 ppm (A6R) iR-ADV DX C5740i 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40/4 ppm (A5R), 40/4 ppm (A6R) iR-ADV DX C5735i 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35/4 ppm (A5R), 35/4 ppm (A6R)		
Print Resolution (dpi)	600 x 600, 1,200 x 1,200		
Page description languages	Standard: UFR II, PCL6, Adobe® PostScript®3™		



imageRUNNER ADVANCE DX C5750i

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX C5700 Series

SEND SPECIFICATIONS

Destination	Standard: E-mail/Internet FAX (SMTP) SMB3.0 FTP WebDAV Mail Box Optional: Super G3 FAX, IP Fax
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)
Send resolution (dpi)	Push: up to 600 x 600 Pull: up to 600 x 600
Communication protocol	File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3
File Format	Standard: TIFF, JPEG, PDF(Limited Color, Compact, Searchable, Apply policy, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS(Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages

FAX SPECIFICATIONS

Maximum Number of Connection Lines	2 (2nd line optional)
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending/Receiving Size	Sending: A3, A4, A4R, A5 ¹ , A5R ¹ , B4, B5 ² , B5R ¹ Receiving: A3, B4, A4, A4R, A5R, B5, B5R ¹ Sent as A4 ² Sent as B4 short
FAX memory	Up to 30,000 pages (2,000 jobs)
Speed dials	Max. 200
Group dials/destinations	Max. 199 dials
Sequential broadcast	Max. 256 addresses
Memory backup	Yes
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

STORE SPECIFICATIONS

Mail Box (Number supported)	1100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows [®] 8.1/10 Concurrent Connections (Max.): SMB:64, WebDAV:3 Standard:16 GB (With option: max. 480GB)
Advanced Space available disc space	
Advanced Space Features:	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

SECURITY SPECIFICATIONS

Authentication and Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print ¹), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle [®] Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) ¹ Requires uniFLOW Online / uniFLOW
Network Security	TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Box in the MFP, Scan and Send -Virus Concerns for E-mail Reception
Device Security	Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), Comply IEEE2600.2 (Common Criteria Certification) (in evaluation)

Device Management and Auditing

Administrator Password, Digital Certificate And Key Management, Audit Log,
Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

ENVIRONMENTAL SPECIFICATIONS

Operating Environment

Temperature: 10 to 30 °C
Humidity: 20 to 80 % RH (Relative Humidity)
220-240 V, 50/60 Hz, 6 A
Maximum: Approx. 1,800 W
Copying (with DADF continuous scan): Approx. 1,015 W^{*1}
Standby: Approx. 62.4 W^{*1}
Sleep mode: Approx. 0.8 W^{*2}
^{*1} Reference value: measured one unit
^{*2} 0.8 W is not available in all circumstances due to certain settings.
Typical Electricity Consumption (TEC)¹:
IR-ADV DX C5760i: 0.86 kWh (BA model: 0.84 kWh)
IR-ADV DX C5750i: 0.71 kWh (BA model: 0.68 kWh)
IR-ADV DX C5740i: 0.59 kWh (BA model: 0.58 kWh)
IR-ADV DX C5735i: 0.45 kWh
^{*} As per USA Energy Star 3.0

Power source

Power consumption

Noise levels (BW/CL)

Sound Power Level (LWA,m)
Active (BW) (1-sided)
IR-ADV DX C5760i: 6.6 B^{*}, Kv 0.3 B^{*}
(BA model: 6.7 B^{*}, Kv 0.3 B^{*})
IR-ADV DX C5750i: 6.5 B^{*}, Kv 0.3 B^{*}
(BA model: 6.5 B^{*}, Kv 0.3 B^{*})
IR-ADV DX C5740i: 6.4 B^{*}, Kv 0.3 B^{*}
(BA model: 6.5 B^{*}, Kv 0.3 B^{*})
IR-ADV DX C5735i: 6.3 B^{*}, Kv 0.3 B^{*}
^{*}Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)
Sound Pressure (LpAm)
Bystander's position:
Active (BW/CL) (1-sided)
IR-ADV DX C5760i: 54 dB^{*}/54 dB^{*}
(BA model: 54 dB^{*}/55 dB^{*})
IR-ADV DX C5750i: 52 dB^{*}/53 dB^{*}
(BA model: 52 dB^{*}/53 dB^{*})
IR-ADV DX C5740i: 52 dB^{*}/52 dB^{*}
(BA model: 53 dB^{*}/53 dB^{*})
IR-ADV DX C5735i: 51 dB^{*}/51 dB^{*}

Stand-by
IR-ADV DX C5760i/C5750i/C5735i: 26 dB^{*}
IR-ADV DX C5740i: 27 dB^{*}
IR-ADV DX C5760i/C5750i/C5740i (BA model): 24 dB^{*}
^{*} Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)
Blue Angel (only C5735i & BA Models)

Standards

CONSUMABLES

Toner Cartridges

C-EXV 51 Toner BK/C/M/Y
C-EXV 51L Toner C/M/Y

Toner Yield (Estimated @ 5% Coverage)

C-EXV 51 Toner BK: 69,000 pages
C-EXV 51 Toner C/M/Y: 60,000 pages
C-EXV 51L Toner C/M/Y: 26,000 pages

Consumables

Staple-P1
Staple Cartridge-Y1

SOFTWARE AND PRINTER MANAGEMENT

Tracking and reporting

For detailed information please visit our website
<https://www.canon-europe.com/business/>

Universal Login Manager (ULM)
uniFLOW Online Express^{*}

^{*} For more information, please refer to [uniFLOW Online Express](#) or [uniFLOW Online](#)

Remote management tools

iW Management Console
eMaintenance
Content Delivery System

Scanning software

Network ScanGear

Platform

MEAP (Multifunctional Embedded Application Platform)

Document Administration

Kofax Power PDF (Optional)

FIERY PRINT CONTROLLER SPECIFICATIONS (EMBEDDED)

For full specifications & options, please visit the Canon website

Optional/Standard

Name

Optional on all models
imagePASS-P2 V1.1 (Embedded)

Print Resolution (dpi)

600 x 600 : 1200 x 1200

Page Description Language(s)

Adobe PS3, PCL6

Memory

4GB (1 x 4GB)

Hard Disk Drive

500 GB SATA

Processor Speed

Intel Pentium G4400 (3.3 GHz)

System

FS350

PAPER SUPPLY OPTIONS

Cassette Feeding Unit-AM1

Paper Capacity: 2 x 550 sheets (80 gsm)
Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead
Paper Size:
A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R
Custom size: 98.0 x 182.0 mm to 304.8 x 457.2 mm
Paper Weight: 52 to 256 gsm
Power Source: From the Main Unit
Dimensions (W x D x H): 620 x 700 x 251 mm (attached to the main unit)
Weight: Approx. 22.5 kg



imageRUNNER ADVANCE DX C5750i

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX C5700 Series

High Capacity Cassette Feeding Unit-A1

Paper Capacity: 2,450 sheets (80 gsm)
 Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Pre-punched, Letterhead
 Paper Size: A4
 Paper Weight: 52 to 256 gsm
 Power Source: From the Main Unit
 Dimensions (W x D x H): 620 x 700 x 251 mm (attached to the main unit)
 Weight: Approx. 30.0 kg

Paper Deck Unit-F1

Paper Capacity: 2,700 sheets (80 gsm)
 Paper Type: Thin, Plain, Color, Recycled, Heavy, Pre-punched
 Paper Size: A4, B5
 Paper Weight: 52 to 256 gsm
 Power Source: From the Main Unit
 Dimensions (W x D x H): 344 x 630 x 440 mm (attached to the main unit)
 Weight: Approx. 31 kg

OUTPUT OPTIONS*

Inner 2way Tray-J1

*Paper capacity may vary with different paper type/size.
 Tray Capacity (80 gsm)
 Upper tray: A4, A5, A5R, A6R, B5: 100 sheets
 SRA3, A3, A4R, B4, B5R: 50 sheets
 Lower tray (standard tray): A4, A5, A5R, A6R, B5: 250 sheets
 SRA3, A3, A4R, B4, B5R: 100 sheets
 Paper Weight: 52 to 300 gsm
 Dimensions (W x D x H): 420 x 407 x 76 mm
 Weight: Approx. 0.7 kg

Copy Tray-J2

Capacity (80gsm):
 A4, A5, A5R, A6R, B5: 100 sheets
 SRA3, A3, A4R, B4, B5R: 75 sheets
 Dimensions (W x D x H): 442 x 373 x 176 mm (attached to the main unit, when the extension tray is extended)
 Weight: 0.5 kg

Inner Finisher-H1

Tray Capacity (80gsm):
 Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R : 45 sheets
 Lower Tray: A4, A5, A5R, B5: 500 sheets,
 SRA3, A3, A4R, B4, B5R, : 250 sheets,
 A6R: 30 sheets
 Envelope: 10 sheets

Paper Weight: 52 to 300 gsm
 Staple Position: Corner, Double
 Staple Capacity:
 A4, B5: 50 sheets (52 to 90 gsm)
 A3, A4R, B4: 30 sheets (52 to 90 gsm)
 Eco Staple:
 A3, A4, B4, B5: 5 sheets (52 to 64 gsm)
 4 sheets (65 to 81.4 gsm)
 3 sheets (82 to 105 gsm)
 Staple On Demand: 40 sheets (80 gsm)
 Power supply: From the main unit
 Dimensions (W x D x H): 585 x 525 x 225 mm (when the extension tray is extended)
 Weight: Approx. 8.6 kg

Staple Finisher-Y1

(Requires Buffer Pass Unit-L1)
 Tray Capacity (80gsm):
 Upper Tray: A4, A5, A5R, A6R, B5: 250 sheets,
 SRA3, A3, A4R, B4, B5R: 125 sheets
 Lower Tray: A4, A5, A5R, B5: 3,000 sheets
 SRA3, A3, A4R, B4, B5R: 1,500 sheets,
 A6R: 250 sheets
 Envelopes: Monarch: 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets
 Paper Weight:
 Upper Tray 52 to 256 gsm,
 Lower Tray 52 to 300 gsm
 Staple Position: Corner, Double
 Staple Capacity:
 A4, B5: 50 sheets (52 to 90 gsm)
 A3, A4R, B4: 30 sheets (52 to 90 gsm)
 Eco Staple:
 A3, A4: 5 sheets (52 to 64 gsm)
 4 sheets (65 to 81.4 gsm)
 3 sheets (82 to 105 gsm)
 Staple On Demand: 50 sheets (52 to 90 gsm)
 Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended)
 Weight: Approx. 31 kg

Booklet Finisher-Y1

(Requires Buffer Pass Unit-L1)
 (Includes the above Staple Finisher-Y1 basic staple specifications.)
 Saddle Stitch paper size: A3, A4R, B4
 Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet 52 to 256 gsm)
 Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm)
 Power supply: From the main unit
 Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended)
 Weight: Approx. 57 kg

Inner 2/4 Hole Puncher-B1

(Requires the Inner Finisher-H1)
 Two or Four Holes
 Acceptable Punch Paper Weight: 52 to 300 gsm
 Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R
 Four holes: A3, A4
 Power Source: From the finisher

Inner 4 Hole Puncher-B1

(Requires the Inner Finisher-H1)
 Four Holes
 Acceptable Punch Paper Weight: 52 to 300 gsm
 Acceptable Punch Paper Size:
 Four holes: A3, A4, A4R, A5, B4, B5, B5R
 Power Source: From the finisher

2/4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)
 Two or Four Holes
 Acceptable Punch Paper Weight: 52 to 300 gsm
 Acceptable Punch Paper Size:
 Two holes: A3, A4, A4R, A5, B4, B5, B5R
 Four holes: A3, A4
 Power Source: From the finisher

4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)
 Four Holes
 Acceptable Punch Paper Weight: 52 to 300 gsm
 Acceptable Punch Paper Size:
 Four holes A3, A4, A4R, A5, B4, B5, B5R
 Power Source: From the finisher

HARDWARE ACCESSORIES

Card Readers

Various card readers available e.g. MiCard Plus. Please contact local Canon Office for more details.
 Copy Card Reader-F1
 Copy Card Reader Attachment-B7

Others

Tab Feeding Attachment-F1
 Utility Tray-B1
 Buffer Pass Unit-L1
 Numeric Keypad-A1

SECURITY OPTIONS

Data Security

HDD Mirroring Kit-J1
 2.5inch/250GB HDD-N1
 2.5inch/1TB HDD-P1

SYSTEM AND CONTROLLER OPTIONS

Print Accessories

PCL International Font Set-A1

Barcode Printing

Barcode Printing Kit-D1

EFI-Fiery Based Controller

imagePASS-P2 V1.1

System Accessories

Copy Control Interface Kit-A1
 Serial Interface Kit-K3
 Connection Kit-A2 for Bluetooth LE
 NFC Kit-E1

Fax Accessories

Super G3 FAX Board-AS1
 Super G3 2nd Line Fax Board-AS1
 Remote Fax Kit-A1
 IP FAX Expansion Kit-B1

OTHER OPTIONS

Accessibility Accessories

ADF Access Handle-A1
 Voice Guidance Kit-G1
 Voice Operation Kit-D1

Software & Solutions



Certifications and compatibility



Canon Ireland
 3006 Lake Drive
 Citywest, Saggart
 Co. Dublin, Ireland
 Telephone No: 01 2052400
 Facsimile No: 01 2052525
 canon.ie

Canon (UK) Ltd
 5 The Square
 Stockley Park
 Uxbridge
 UB11 1ET
 Tel: 01895 648 000
 www.canon.co.uk

Canon Inc.
 canon.com
Canon Europe
 canon-europe.com
 English edition
 © Canon Europa N.V., 2020

