


# imageRUNNER ADVANCE DX C5700 Series

## STREAMLINE BUSINESS EFFICIENCY WITH SMART, COLOUR A3 MULTIFUNCTION DEVICES



### MAIN CONFIGURATION OPTIONS

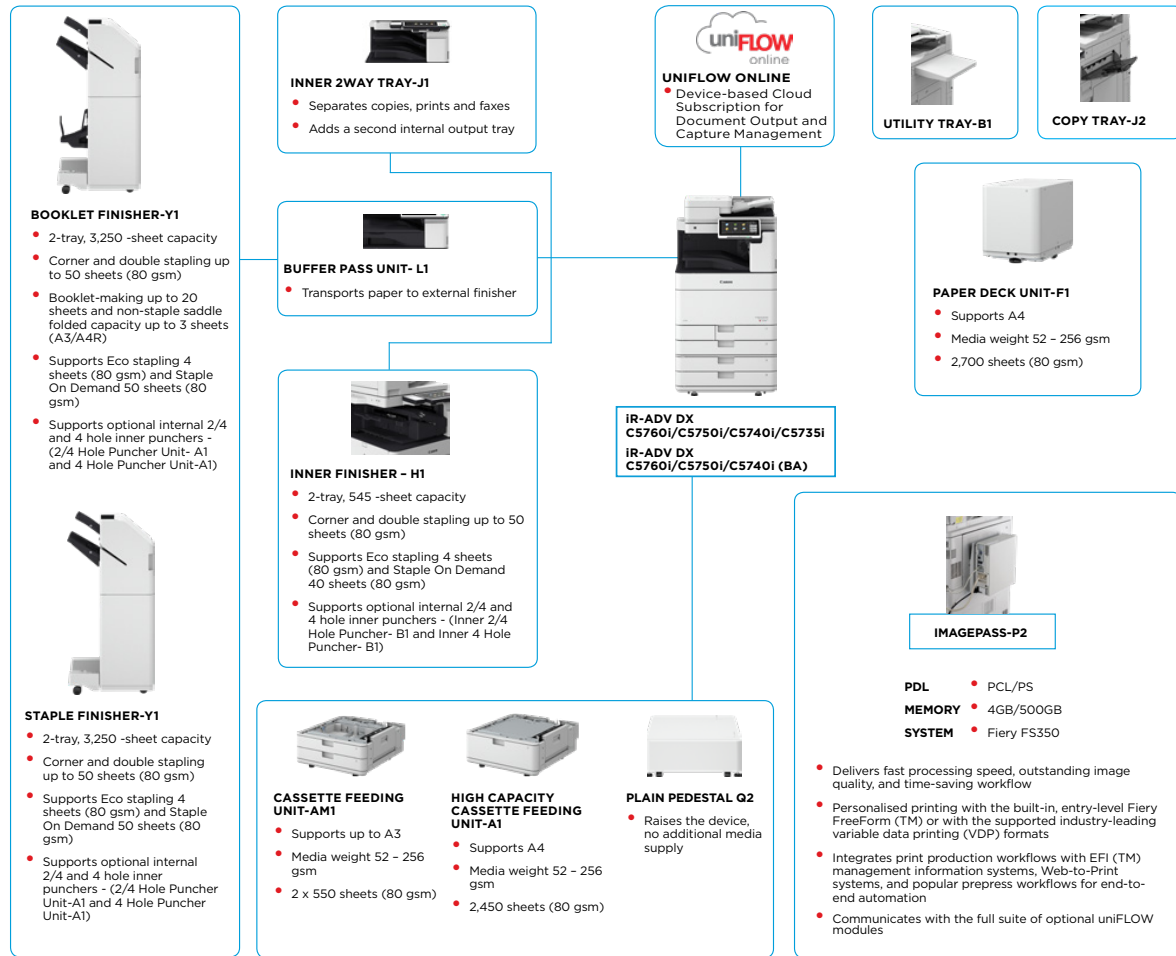

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire IR ADVANCE DX portfolio.

# imageRUNNER ADVANCE DX C5760i

## TECHNICAL SPECIFICATIONS

## imageRUNNER ADVANCE DX C5700 Series

<b>MAIN UNIT</b>		<b>Direct Print</b>	Supported file types: PDF, EPS, TIFF/JPEG, and XPS
<b>Machine type</b>	A3 Color Laser Multifunctional	<b>Printing from mobile and cloud</b>	AirPrint, Mopria, Google Cloud Print, Canon PRINT Business and uniFLOW Online
<b>Core functions</b>	Print, Copy, Scan, Send, Store and Optional Fax		A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
<b>Processor</b>	1.75GHz Dual Core Processor		PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT J/K/S/T* (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts* * Optional PCL International Font Set-A1 is required. * Optional Barcode Printing Kit-D1 is required.
<b>Control Panel</b>	10.1" TFT LCD WSVGA Color Touch panel	<b>Fonts</b>	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
<b>Memory</b>	Standard: 4.0GB RAM		UFRiL: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later) PCL: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019 PS: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later) PPD: Windows® 7/8.1/10, Mac OS X(10.9 or later) McAfee Embedded Control Software As of Feb 2020
<b>Hard Disk drive</b>	Standard*: 320GB (available disk space: 250GB), Optional: 250GB, 1TB *A different initial HDD may be used.	<b>Print Features</b>	
<b>Mirroring Hard Disk Drive</b>	Optional		
<b>Interface Connection</b>	<b>NETWORK</b> Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n); Optional: NFC, Bluetooth Low Energy <b>OTHERS</b> Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Serial Interface, Copy Control Interface	<b>Operating System</b>	
<b>Paper Supply Capacity (A4, 80gsm)</b>	Standard: 1200 sheets 100-sheet multi-purpose tray x 1 550-sheet cassettes x 2, Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-A1 + Paper Deck Unit-F1)	<b>COPY SPECIFICATIONS</b>	
<b>Paper output capacity (A4, 80gsm)</b>	Standard: 250 sheets Maximum: 3,450 Sheets (with Staple Finisher-Y1 or Booklet Finisher-Y1 and Copy Tray-J2)	<b>Copy Speed (BW/CL)</b>	iR-ADV DX C5760i up to 60 ppm (A4, A5, A5R, A6R), up to 32 ppm (A3), up to 36 ppm (A4R) iR-ADV DX C5750i up to 50 ppm (A4, A5, A5R, A6R), up to 27 ppm (A3), up to 30 ppm (A4R) iR-ADV DX C5740i up to 40 ppm (A4, A5, A5R, A6R), up to 22 ppm (A3), up to 24 ppm (A4R) iR-ADV DX C5735i up to 35 ppm (A4, A5, A5R, A6R), up to 18 ppm (A3), up to 23 ppm (A4R)
<b>Finishing capabilities</b>	Standard: Collate, Group With Options: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand	<b>First-Copy-Out Time (A4, BW/CL)</b>	iR-ADV DX C5760i: Approx. 2.9/4.5 seconds or less iR-ADV DX C5750i: Approx. 3.5/5.2 seconds or less iR-ADV DX C5740i: Approx. 4.1/6.1 seconds or less iR-ADV C5735i: Approx. 4.9/7.4 seconds or less
<b>Supported Media Types</b>	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Coated, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Tab, Envelope  Paper Cassette (Upper/Lower): Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* *Envelope Feeder Attachment (standard) is required.	<b>Copy resolution (dpi)</b>	600 x 600
<b>Supported Media Sizes</b>	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Free Size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Envelopes: COM 10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 98.4 mm to 320.0 x 457.2 mm  Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 98.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: COM10 No.10, DL, ISO-C5  Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 182.0 mm to 304.8 x 457.2 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5	<b>Multiple Copies</b>	Up to 999 copies
<b>Supported media weights</b>	Multi-purpose tray: 52 to 300 gsm Paper Cassette (Upper/Lower): 52 to 256 gsm Duplex: 52 to 220 gsm	<b>Copy Density</b>	Automatic or Manual (9 Levels)
<b>Warm-up Time</b>	Quick Startup Mode: 4 Seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display.  From Sleep Mode: 10 Seconds or Less  From Power On: 10 Seconds or less* *Time from device power-on, until copy ready (not print reservation).	<b>Magnification</b>	Variable zoom: 25% to 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%(1:1), 141%, 200%, 400%
<b>Dimensions (W x D x H)</b>	iR-ADV DX C5760i/C5750i/C5740i/C5735i: 620 x 722 x 937 mm iR-ADV DX C5760i/C5750i/C5740i (BA models): 620 x 860 x 937 mm	<b>Copy Features</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
<b>Installation Space(W x D)</b>	iR-ADV DX C5760i/C5750i/C5740i/C5735i: Basic: 1,083 x 1,162 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 1,866 x 1,162 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open) iR-ADV DX C5760i/C5750i/C5740i (BA models): Basic: 1,083 x 1,300 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 1,866 x 1,300 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open)	<b>SCAN SPECIFICATIONS</b>	
<b>Weight</b>	iR-ADV DX C5760i/C5750i/C5740i/C5735i: Approx. 143 kg including toner [iR-ADV DX C5760i/C5750i/C5740i (BA models): Approx. 145 kg including toner]	<b>Type</b>	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Detect Feeder Multi Sheet Feed is supported. up to 200 Sheets
<b>PRINT SPECIFICATIONS</b>		<b>Document Feeder Paper Capacity (80 gsm)</b>	Platen: Sheet, Book, and 3-Dimensional Objects Document Feeder media weight: 1-sided scanning: 38 to 220 gsm (BW, CL) 2-sided scanning: 38 to 220 gsm (BW, CL) *An acceptable weights of A6R or smaller is 50 to 220gsm.
<b>Print Speed (BW/CL)</b>	iR-ADV DX C5760i 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60/5 ppm (A5R), 60/5 ppm (A6R) iR-ADV DX C5750i 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50/4 ppm (A5R), 50/4 ppm (A6R) iR-ADV DX C5740i 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40/4 ppm (A5R), 40/4 ppm (A6R) iR-ADV DX C5735i 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35/4 ppm (A5R), 35/4 ppm (A6R)	<b>Acceptable Originals and weights</b>	Platen scanning size: up to 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 70.0 x 139.7 mm to 304.8 x 431.8 mm
<b>Print Resolution (dpi)</b>	600 x 600, 1,200 x 1,200	<b>Supported media sizes</b>	1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy), 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy)
<b>Page description languages</b>	Standard: UFR II, PCL6, Adobe® PostScript®3™	<b>Scan Speed (ipm: BW/CL; A4)</b>	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
		<b>Pull Scan Specifications</b>	Color Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server 2016 Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online)
		<b>Scan Method</b>	



# imageRUNNER ADVANCE DX C5760i

## TECHNICAL SPECIFICATIONS

## imageRUNNER ADVANCE DX C5700 Series

### SEND SPECIFICATIONS

<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP) SMB3.0 FTP WebDAV Mail Box Optional: Super G3 FAX, IP Fax
<b>Address Book</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)
<b>Send resolution (dpi)</b>	Push: up to 600 x 600 Pull: up to 600 x 600
<b>Communication protocol</b>	File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3
<b>File Format</b>	Standard: TIFF, JPEG, PDF(Limited Color, Compact, Searchable, Apply policy, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS(Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages

### FAX SPECIFICATIONS

<b>Maximum Number of Connection Lines</b>	2 (2nd line optional)
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps
<b>Compression Method</b>	MH, MR, MMR, JBIG
<b>Resolution (dpi)</b>	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
<b>Sending/Receiving Size</b>	Sending: A3, A4, A4R, A5 <sup>1</sup> , A5R <sup>1</sup> , B4, B5 <sup>2</sup> , B5R <sup>1</sup> Receiving: A3, B4, A4, A4R, A5R, B5, B5R <sup>1</sup> Sent as A4 <sup>2</sup> Sent as B4 short
<b>FAX memory</b>	Up to 30,000 pages (2,000 jobs)
<b>Speed dials</b>	Max. 200
<b>Group dials/destinations</b>	Max. 199 dials
<b>Sequential broadcast</b>	Max. 256 addresses
<b>Memory backup</b>	Yes
<b>Fax Features</b>	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

### STORE SPECIFICATIONS

<b>Mail Box (Number supported)</b>	1100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored
<b>Advanced Space</b>	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 8.1/10 Concurrent Connections (Max.): SMB:64, WebDAV:3 Standard:16 GB (With option: max. 480GB)
<b>Advanced Space available disc space</b>	
<b>Advanced Space Features:</b>	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

### SECURITY SPECIFICATIONS

<b>Authentication and Access Control</b>	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
<b>Document Security</b>	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print <sup>1</sup> ), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) <sup>1</sup> Requires uniFLOW Online / uniFLOW
<b>Network Security</b>	TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Box in the MFP, Scan and Send -Virus Concerns for E-mail Reception
<b>Device Security</b>	Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), Comply IEEE2600.2 (Common Criteria Certification) (in evaluation)

### Device Management and Auditing

Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

### ENVIRONMENTAL SPECIFICATIONS

#### Operating Environment

Temperature: 10 to 30 °C  
Humidity: 20 to 80 % RH (Relative Humidity)  
220-240 V, 50/60 Hz, 6 A  
Maximum: Approx. 1,800 W  
Copying (with DADF continuous scan): Approx. 1,015 W<sup>1</sup>  
Standby: Approx. 62.4 W<sup>1</sup>  
Sleep mode: Approx. 0.8 W<sup>2</sup>  
<sup>1</sup> Reference value: measured one unit  
<sup>2</sup> 0.8 W is not available in all circumstances due to certain settings.  
Typical Electricity Consumption (TEC)<sup>3</sup>:  
IR-ADV DX C5760i: 0.86 kWh (BA model: 0.84 kWh)  
IR-ADV DX C5750i: 0.71 kWh (BA model: 0.68 kWh)  
IR-ADV DX C5740i: 0.59 kWh (BA model: 0.58 kWh)  
IR-ADV DX C5735i: 0.45 kWh  
<sup>3</sup> As per USA Energy Star 3.0

#### Power source

#### Power consumption

#### Noise levels (BW/CL)

Sound Power Level (LWA,m)  
Active (BW) (1-sided)  
IR-ADV DX C5760i: 6.6 B\*, Kv 0.3 B\*  
(BA model: 6.7 B\*, Kv 0.3 B\*)  
IR-ADV DX C5750i: 6.5 B\*, Kv 0.3 B\*  
(BA model: 6.5 B\*, Kv 0.3 B\*)  
IR-ADV DX C5740i: 6.4 B\*, Kv 0.3 B\*  
(BA model: 6.5 B\*, Kv 0.3 B\*)  
IR-ADV DX C5735i: 6.3 B\*, Kv 0.3 B\*  
<sup>1</sup> Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)  
Sound Pressure (LpAm)  
Bystander's position:  
Active (BW/CL) (1-sided)  
IR-ADV DX C5760i: 54 dB<sup>1</sup>/54 dB\*  
(BA model: 54 dB<sup>1</sup>/55 dB\*)  
IR-ADV DX C5750i: 52 dB<sup>1</sup>/53 dB\*  
(BA model: 52 dB<sup>1</sup>/53 dB\*)  
IR-ADV DX C5740i: 52 dB<sup>1</sup>/52 dB\*  
(BA model: 53 dB<sup>1</sup>/53 dB\*)  
IR-ADV DX C5735i: 51 dB<sup>1</sup>/51 dB\*

Stand-by  
IR-ADV DX C5760i/C5750i/C5735i: 26 dB\*  
IR-ADV DX C5740i: 27 dB\*  
IR-ADV DX C5760i/C5750i/C5740i (BA model): 24 dB\*  
<sup>1</sup> Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)  
Blue Angel (only C5735i & BA Models)

### Standards

### CONSUMABLES

#### Toner Cartridges

C-EXV 51 Toner BK/C/M/Y  
C-EXV 51L Toner C/M/Y

#### Toner Yield (Estimated @ 5% Coverage)

C-EXV 51 Toner BK: 69,000 pages  
C-EXV 51 Toner C/M/Y: 60,000 pages  
C-EXV 51L Toner C/M/Y: 26,000 pages

#### Consumables

Staple-P1  
Staple Cartridge-Y1

### SOFTWARE AND PRINTER MANAGEMENT

#### Tracking and reporting

For detailed information please visit our website  
<https://www.canon-europe.com/business/>

Universal Login Manager (ULM)  
uniFLOW Online Express\*

\* For more information, please refer to  
[uniFLOW Online Express](#)  
[uniFLOW Online](#)

#### Remote management tools

iW Management Console  
eMaintenance  
Content Delivery System

#### Scanning software

Network ScanGear

#### Platform

MEAP (Multifunctional Embedded Application Platform)

#### Document Administration

Kofax Power PDF (Optional)

### FIERY PRINT CONTROLLER SPECIFICATIONS (EMBEDDED)

For full specifications & options, please visit the Canon website

#### Optional/Standard

##### Name

Optional on all models  
imagePASS-P2 V1.1 (Embedded)

##### Print Resolution (dpi)

600 x 600 : 1200 x 1200

##### Page Description Language(s)

Adobe PS3, PCL6

##### Memory

4GB (1 x 4GB)

##### Hard Disk Drive

500 GB SATA

##### Processor Speed

Intel Pentium G4400 (3.3 GHz)

##### System

FS350

### PAPER SUPPLY OPTIONS

#### Cassette Feeding Unit-AM1

Paper Capacity: 2 x 550 sheets (80 gsm)  
Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead  
Paper Size:  
A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R  
Custom size: 98.0 x 182.0 mm to 304.8 x 457.2 mm  
Paper Weight: 52 to 256 gsm  
Power Source: From the Main Unit  
Dimensions (W x D x H): 620 x 700 x 251 mm (attached to the main unit)  
Weight: Approx. 22.5 kg



# imageRUNNER ADVANCE DX C5760i

## TECHNICAL SPECIFICATIONS

## imageRUNNER ADVANCE DX C5700 Series

### High Capacity Cassette Feeding Unit-A1

Paper Capacity: 2,450 sheets (80 gsm)  
Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Pre-punched, Letterhead  
Paper Size: A4  
Paper Weight: 52 to 256 gsm  
Power Source: From the Main Unit  
Dimensions (W x D x H): 620 x 700 x 251 mm (attached to the main unit)  
Weight: Approx. 30.0 kg

### Paper Deck Unit-F1

Paper Capacity: 2,700 sheets (80 gsm)  
Paper Type: Thin, Plain, Color, Recycled, Heavy, Pre-punched  
Paper Size: A4, B5  
Paper Weight: 52 to 256 gsm  
Power Source: From the Main Unit  
Dimensions (W x D x H): 344 x 630 x 440 mm (attached to the main unit)  
Weight: Approx. 31 kg

### OUTPUT OPTIONS\*

#### Inner 2way Tray-J1

\*Paper capacity may vary with different paper type/size.  
Tray Capacity (80 gsm)  
Upper tray: A4, A5, A5R, A6R, B5: 100 sheets  
SRA3, A3, A4R, B4, B5R: 50 sheets  
Lower tray (standard tray): A4, A5, A5R, A6R, B5: 250 sheets  
SRA3, A3, A4R, B4, B5R: 100 sheets  
Paper Weight: 52 to 300 gsm  
Dimensions (W x D x H): 420 x 407 x 76 mm  
Weight: Approx. 0.7 kg

#### Copy Tray-J2

Capacity (80gsm):  
A4, A5, A5R, A6R, B5: 100 sheets  
SRA3, A3, A4R, B4, B5R: 75 sheets  
Dimensions (W x D x H): 442 x 373 x 176 mm (attached to the main unit, when the extension tray is extended)  
Weight: 0.5 kg

#### Inner Finisher-H1

Tray Capacity (80gsm):  
Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R : 45 sheets  
Lower Tray: A4, A5, A5R, B5: 500 sheets,  
SRA3, A3, A4R, B4, B5R, : 250 sheets,  
A6R: 30 sheets  
Envelope: 10 sheets

Paper Weight: 52 to 300 gsm  
Staple Position: Corner, Double  
Staple Capacity:  
A4, B5: 50 sheets (52 to 90 gsm)  
A3, A4R, B4: 30 sheets (52 to 90 gsm)  
Eco Staple:  
A3, A4, B4, B5: 5 sheets (52 to 64 gsm)  
4 sheets (65 to 81.4 gsm)  
3 sheets (82 to 105 gsm)  
Staple On Demand: 40 sheets (80 gsm)  
Power supply: From the main unit  
Dimensions (W x D x H): 585 x 525 x 225 mm (when the extension tray is extended)  
Weight: Approx. 8.6 kg

#### Staple Finisher-Y1

(Requires Buffer Pass Unit-L1)  
Tray Capacity (80gsm):  
Upper Tray: A4, A5, A5R, A6R, B5: 250 sheets,  
SRA3, A3, A4R, B4, B5R: 125 sheets  
Lower Tray: A4, A5, A5R, B5: 3,000 sheets  
SRA3, A3, A4R, B4, B5R: 1,500 sheets,  
A6R: 250 sheets  
Envelopes: Monarch: 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets  
Paper Weight:  
Upper Tray 52 to 256 gsm,  
Lower Tray 52 to 300 gsm  
Staple Position: Corner, Double  
Staple Capacity:  
A4, B5: 50 sheets (52 to 90 gsm)  
A3, A4R, B4: 30 sheets (52 to 90 gsm)  
Eco Staple:  
A3, A4: 5 sheets (52 to 64 gsm)  
4 sheets (65 to 81.4 gsm)  
3 sheets (82 to 105 gsm)  
Staple On Demand: 50 sheets (52 to 90 gsm)  
Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended)  
Weight: Approx. 31 kg

#### Booklet Finisher-Y1

(Requires Buffer Pass Unit-L1)  
(Includes the above Staple Finisher-Y1 basic staple specifications.)  
Saddle Stitch paper size: A3, A4R, B4  
Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet 52 to 256 gsm)  
Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm)  
Power supply: From the main unit  
Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended)  
Weight: Approx. 57 kg

#### Inner 2/4 Hole Puncher-B1

(Requires the Inner Finisher-H1)  
Two or Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R  
Four holes: A3, A4

#### Inner 4 Hole Puncher-B1

(Requires the Inner Finisher-H1)  
Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size:  
Four holes: A3, A4, A4R, A5, B4, B5, B5R  
Power Source: From the finisher

#### 2/4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)  
Two or Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size:  
Two holes: A3, A4, A4R, A5, B4, B5, B5R  
Four holes: A3, A4  
Power Source: From the finisher

#### 4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)  
Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size:  
Four holes A3, A4, A4R, A5, B4, B5, B5R  
Power Source: From the finisher

### HARDWARE ACCESSORIES

#### Card Readers

Various card readers available e.g. MiCard Plus. Please contact local Canon Office for more details.  
Copy Card Reader-F1  
Copy Card Reader Attachment-B7

#### Others

Tab Feeding Attachment-F1  
Utility Tray-B1  
Buffer Pass Unit-L1  
Numeric Keypad-A1

### SECURITY OPTIONS

#### Data Security

HDD Mirroring Kit-J1  
2.5inch/250GB HDD-N1  
2.5inch/1TB HDD-P1

### SYSTEM AND CONTROLLER OPTIONS

#### Print Accessories

PCL International Font Set-A1

#### Barcode Printing

Barcode Printing Kit-D1

#### EFI-Fiery Based Controller

imagePASS-P2 V1.1

#### System Accessories

Copy Control Interface Kit-A1  
Serial Interface Kit-K3  
Connection Kit-A2 for Bluetooth LE  
NFC Kit-E1

#### Fax Accessories

Super G3 FAX Board-AS1  
Super G3 2nd Line Fax Board-AS1  
Remote Fax Kit-A1  
IP FAX Expansion Kit-B1

### OTHER OPTIONS

#### Accessibility Accessories

ADF Access Handle-A1  
Voice Guidance Kit-G1  
Voice Operation Kit-D1

## Software & Solutions



## Certifications and compatibility



**Canon Ireland**  
3006 Lake Drive  
Citywest, Saggart  
Co. Dublin, Ireland  
Telephone No: 01 2052400  
Facsimile No: 01 2052525  
canon.ie

**Canon (UK) Ltd**  
5 The Square  
Stockley Park  
Uxbridge  
UB11 1ET  
Tel: 01895 648 000  
www.canon.co.uk

**Canon Inc.**  
canon.com  
**Canon Europe**  
canon-europe.com  
English edition  
© Canon Europa N.V., 2020