



i-SENSYS X 1440P Series

FULLY SECURE, HIGH-SPEED DEVICES DELIVERING HIGH-QUALITY PRINT OUTPUT

Compact and secure A4 black and white laser printers to complement larger office print solutions



CONNECTIVITY



SECURITY



SUSTAINABILITY



PRODUCTIVITY



CONTROL &
MAINTENANCE



COMPACT DESIGN

Canon

i-SENSYS X 1440P Series

CONNECTIVITY

- Print from mobile devices, wherever you are
- Remote device set-up and control with the Canon Print Business App
- Connect to cloud directly from the device for simple storage solutions or through Canon's uniFLOW Online for secure print workflows*

SECURITY

- Embedded User Authentication secures device access to authorised persons only
- Encrypted Secure Print locks down documents data in transit
- Verify System at Start-up with Automatic Recovery enhances device integrity
- Enjoy latest network security protocol with TLS 1.3 support

SUSTAINABILITY

- Low energy consumption decreases running costs
- Sleep Mode function and innovative low melting point toner reduce energy consumption further
- Auto Duplex Print decreases paper usage

PRODUCTIVITY

- Fast print speeds at 40ppm (A4)
- Intuitive control with either 5-line LCD or 5" colour touchscreen display
- Double-sided printing as standard
- Up to 900 sheets paper input capacity

CONTROL AND MAINTENANCE

- Cloud and server-based software options for centralised fleet control
- Flexible user management solutions for business administrators and IT department
- Remote access to device control functions
- Toner status tool reduces downtime

COMPACT DESIGN

- Small footprint and weight allow for any office configuration
- Add additional cassettes for enhanced input capacity without compromising on device size
- All-in-one space saving toner cartridge

*1440P model only

QUICK FACTS


i-SENSYS X 1440P

- 5-inch/12.7cm TFT LCD touchscreen
- Print speed: 40 ppm (A4)
- Print resolution: Up to 1,200 x 1,200 dpi
- Automatic Double-sided printing
- uniFLOW compatibility
- Print directly from Cloud (Dropbox, GoogleDrive, OneDrive)
- Network, USB, Wi-Fi and QR code connectivity
- Max paper input capacity: 900 sheets

i-SENSYS X 1440Pr

- 5-line LCD display
- Print Speed: 40ppm (A4)
- Print resolution: up to 1,200 x 1,200 dpi
- Automatic Double-sided printing
- Network, USB and Wi-Fi connectivity
- Max paper input capacity: 900 sheets

TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

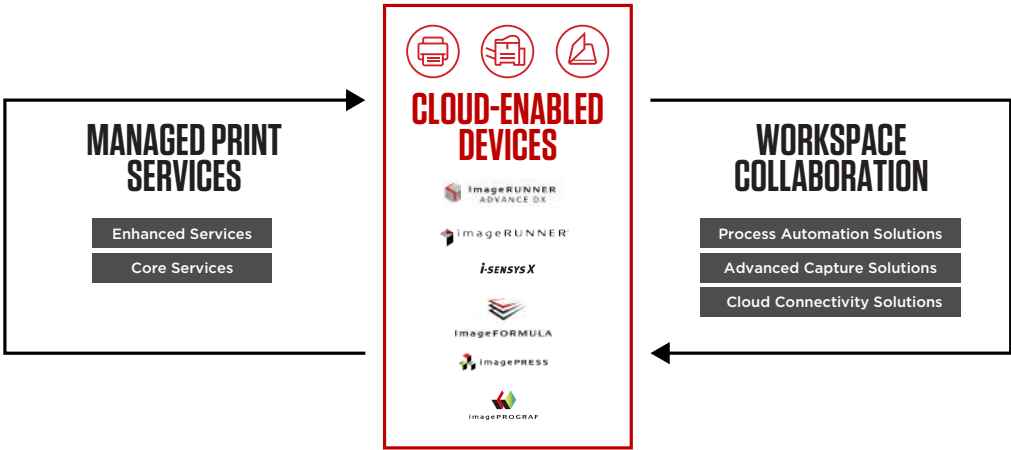

Canon's Digital Transformation Services (DTS), bring together our leading hardware and software into an integrated technology ecosystem, designed to support your transformation journey. This offering combines Managed Print Services and Workspace Collaboration solutions, to help you gain transparency and control over the entire document lifecycle.



TECHNICAL SPECIFICATIONS

i-SENSYS X 1440P Series

PRINTER ENGINE		Control panel	
Print speed	Single sided: Up to 40 ppm (A4) Up to 65.4 ppm(A5-Landscape) Double sided : Up to 33.6 ipm (A4)		i-SENSYS X 1440P : 12.7 cm LCD Colour Touch Screen i-SENSYS X 1440Pr : 5 Line LCD, 3 LED (Job, Error, Energy saver), Buttons, 10-key numeric keypad
Printing method	Monochrome laser beam printing	CONTROLLER	
Print resolution	Up to 1200 x 1200 dpi	Processor Speed	1200MHz
Warm-up time	Approx. 14 seconds or less from power on	Memory	1GB
First Page Out Time	Approx: 5.0 seconds or less	Storage	4GB eMMC
Recommended Monthly Print Volume	750 - 4,000 pages per month	Printer Languages	UFRII, PCL 5e ⁵ , PCL6, Adobe® PostScript3
Duty cycle	80,000 pages	Fonts	93 PCL fonts, 136 PS fonts
Print margins	5 mm-top, bottom, left and right	Interface and connectivity	USB 2.0 Hi-Speed, 10BASE-T/ 100BASE-TX/1000Base-T, Wireless 802.11b/g/n, Wireless Direct Connection
Advanced printing features	i-SENSYS X 1440P: Encrypted Secure Print Secure Print Print from USB memory key (JPEG/TIFF/PDF) Print from Cloud ¹ : uniFLOW Online, Dropbox, GoogleDrive, OneDrive (PDF/JPEG) Barcode Print ² iOS: AirPrint, Canon PRINT Business app Android; Mopria certified, Canon Print Service Plug-in, Canon PRINT Business app Universal Print by Microsoft	Network Protocol	Print: TCP/IP (LPD/Port9100/IPP/IPPS/WSD)
	i-SENSYS X 1440Pr: Encrypted Secure Print Secure Print Print from USB memory key (JPEG/TIFF/PDF) Barcode Print ² iOS: AirPrint, Canon PRINT Business app Android; Mopria certified, Canon Print Service Plug-in, Canon PRINT Business app Universal Print by Microsoft		Management: SNMPv1, SNMPv3 (IPv4,IPv6)
			Security: TLS1.3, IPsec, IP/Mac address filtering, IEEE802.1X, SNMPv3, SSL (HTTPS, IPPS) Security (wireless): Infrastructure Mode: WEP(64/128 bit), WPA-PSK(TKIP/AES), WPA2-PSK(TKIP/AES), WPA-EAP(AES), WPA2-EAP(AES) Access Point Mode: WPA2-PSK(AES)
		Software and Printer Management	i-SENSYS X 1440P: Remote User Interface (RUI), Remote Operation Viewer, Department ID Management, Toner Status Tool, iW Enterprise Management Console: Server-based software for centralised management of a fleet of devices eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics. Universal Log-in Manager / uniFLOW online / uniFLOW online Express / uniFLOW compatibility / Application Library
			i-SENSYS X 1440Pr: Remote User Interface (RUI), Department ID Management, Toner Status Tool, iW Enterprise Management Console: Server-based software for centralised management of a fleet of devices eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.
MEDIA HANDLING		Operating Systems Compatibility	Windows® 11 / Windows® 10 / Server® 2022 / Server® 2019 / Server® 2016 / Server® 2012R2 / Server® 2012 Mac OS X version 10.13 & up Linux ⁶
Paper input (Standard)	250-sheet cassette 100-sheet multi-purpose tray		
Paper input (Option)	550-sheet cassette		
Maximum paper input capacity	900-sheet		
Paper output	150-sheet		
Media types	Plain paper, Recycled paper, Heavy Paper, Thin paper, Label, Post card, Envelope	CONSUMABLES	
Media sizes	Cassette (Standard and optional): A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Custom sizes: Min. 105 x 148 mm Max. 216.0 x 355.6 mm. Multi-purpose tray: A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Indexcard, Envelope (COM10, Monarch, C5, DL), Custom sizes: Min 76.2 x 127 mm Max. 216.0 x 355.6 mm.	All-in-One cartridges	TONER T13 (10,600 pages ⁷)
Media weights	Cassette (standard and optional): 60 to 120 g/m ² Multi-purpose tray: 60 to 199 g/m ²	ACCESSORIES/ OPTIONS	
Double sided printing	A4, Legal, Letter, OFFICIO, B-OFFICIO, M-OFFICIO, GLGL, Foolscap Custom size - Min. 210 x 279.4 mm Max. 216.0 x 355.6 mm	Items	i-SENSYS X 1440P: Cassette Feeding Module-AH1 MiCard Multi (Card reader for identification with RFID or magnetic cards with uniFLOW) Micard Plus (Card reader for identification with RFID or magnetic cards with uniFLOW) MiCard Attachment kit-B1 Barcode Printing Kit-E1E i-SENSYS X 1440Pr: Cassette Feeding Module-AH1 Barcode Printing Kit-E1E
GENERAL FEATURES		Notes:	
Power requirements	220-240V(±10%) 50/60Hz (±2Hz)	(1) Subscription to uniFLOW Online and/or third party cloud service is required.	
Power consumption	Maximum: Approx. 1,250 W Active printing: Approx. 480W Standby: Approx. 6 W Sleep mode: Approx. 0.9 W Typical Electricity Consumption (TEC): 0.33 kWh/ week ⁸ For detailed information relating to Lot26 regulation, please go to: http://www.canon-europe.com/For_Work/Lot26/index.aspx	(2) Accessory - Barcode Printing Kit-E1E - is required.	
Noise level	Sound Pressure ³ : Active: 54 dB Standby: Inaudible ⁴ Sound Power ⁵ : Active: 68 dB Standby: Inaudible ⁴	(3) Declared noise emission in accordance with ISO 9296.	
Dimensions (W x D x H)	i-SENSYS X 1440P : 438 mm x 373 mm x 312 mm i-SENSYS X 1440Pr : 401 mm x 373 mm x 250 mm	(4) Inaudible means that the emission sound pressure level for a bystander is lower than absolute standard for background noise in accordance with ISO 7779.	
Weight	i-SENSYS X 1440P : Approx. 9.2 Kg i-SENSYS X 1440Pr: Approx. 8.8 Kg	(5) A Canon PCL5e driver is not supplied, however PCL5e commands are supported on the device.	
Operating environment	Temperature: 10 to 30°C (50 to 86°F) Humidity 20 to 80% RH (no condensation)	(6) Web distribution only.	
		(7) Based on ISO/IEC 19752	
		(8) As per US ENERGY STAR® version3.0.	



Software & Solutions



Compatibility



Canon Ireland
3006 Lake Drive
Citywest, Saggart
Co. Dublin, Ireland
Telephone No: 01 2052400
Facsimile No: 01 2052525
canon.ie

Canon (UK) Ltd
The Bower
4 Roundwood
Avenue
Stockley Park
Uxbridge
UB11 1AF

Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
© Canon Europa N.V., 2023

Canon
