

imageRUNNER ADVANCE DX 4700 Series

MONO A3 MULTIFUNCTION DEVICES WITH ENHANCED CLOUD CONNECTIVITY THAT ALLOW YOU TO COLLABORATE SECURELY FROM ANYWHERE




Canon uniFLOW Online
Outstanding Cloud Output Management Solution



New to the Line

MAIN CONFIGURATION OPTIONS

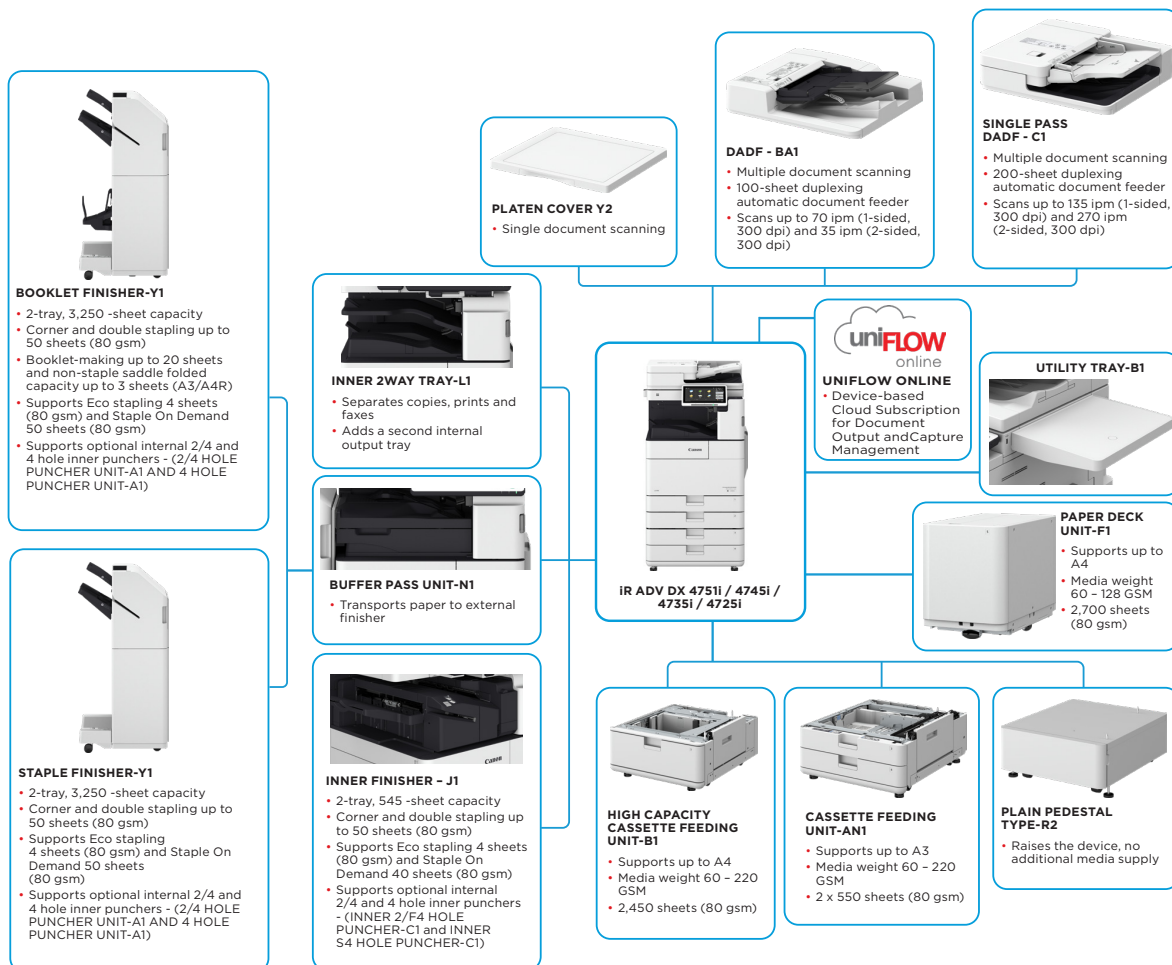

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online [product configurator](#).

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire IR ADVANCE DX portfolio.



imageRUNNER ADVANCE DX 4735i

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX 4700 Series

MAIN UNIT

Machine type	A3 Monochrome Laser Multifunctional
Core functions	Print, Copy, Scan, Send, Store and Optional Fax
Processor	1.75GHz Dual Core Processor
Control Panel	Standard: 10.1" TFT LCD WSVGA Color Touch panel
Memory	Standard: 3.0 GB RAM
Hard Disk drive	Standard*: 320 GB (available disk space: 250 GB), Optional: 250GB, 1TB * A different initial HDD may be used.
Mirroring Hard Disk Drive	Optional
Interface Connection	NETWORK Standard: 100Base-T/100Base-TX/10Base-T, Wireless LAN(IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Low Energy OTHERS Standard: USB 2.0(Host) x1, USB 3.0(Host) x1, USB 2.0(Device) x1 Optional: Serial interface, Copy Control Interface

Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets 100-sheet Multi-purpose tray x 1 550-sheet cassette x 2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-B1 and Paper Deck Unit-F1)
--	--

Paper output capacity (A4, 80gsm)	Standard: 250 Sheets Maximum: 3,350 Sheets (with Buffer Pass-N1 + Staple Finisher-Y1 or Booklet Finisher-Y1)
--	--

Finishing capabilities	Standard: Collate, Group With options : Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand
-------------------------------	--

Supported media types	Multi-purpose tray: Thin, Plain, Heavy, Color, Recycled, Pre-punched, Transparency, Tracing, Label, Bond, Envelope Paper Cassette (Upper/Lower): Thin, Plain, Heavy, Color, Recycled, Pre-punched
------------------------------	--

Supported media sizes	Multi-purpose tray: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 98.0 x 148.0 mm to 297.0 x 431.8 mm Free Size: 98.0 x 148.0 mm to 297.0 x 431.8 mm Envelope: COM10 No.10, Monarch, DL, ISO-C5 Custom size envelope: 98.0 x 148.0mm to 297.0 x 431.8mm Upper Cassette: Standard size: A4, A4R, A5R, B4, B5, B5R Custom size: 139.7 x 182.0 mm to 297.0 x 390.0 mm Lower Cassette: Standard size: A3, A4, A4R, A5R, B4, B5, B5R Custom size: 139.7 x 182.0 mm to 297.0 x 431.8 mm Envelope*: COM10 No.10, Monarch, DL, ISO-C5 * Envelope Feeder Attachment-D1 is required.
------------------------------	--

Supported media weights	Multi-purpose tray: 52 to 220 gsm *Thin (52 to 59gsm): vertical grain paper feed only Paper Cassettes (Upper/Lower): 60 to 220 gsm Duplex: 60 to 105 gsm
--------------------------------	---

Warm-up Time	Quick startup mode: 4 seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 Seconds or Less From Power On: 24 seconds or less* *Time from device power-on, until copy ready (not print reservation)
---------------------	---

Dimensions (W x D x H)	With Platen Cover-Y2: 608 x 713 x 822 mm With Single Pass DADF-C1: 608 x 722 x 932 mm With DADF-BA1: 608 x 719 x 926 mm
-------------------------------	---

Installation Space(W x D)	Basic: 1,116 x 1,160 mm (with Platen Cover Type Y2 + Multi-purpose tray open/extension tray extended + Paper Cassette open) 1,116 x 1,169 mm (with Single Pass DADF-C1 + Multi-purpose tray open/extension tray extended + Paper Cassette open) 1,116 x 1,166 mm (with DADF-BA1 + Multi-purpose tray open/extension tray extended + Paper Cassette open) Fully Configured: 1,811 x 1,169 mm (with Single Pass DADF-C1 + Paper Deck Unit-F1 + Booklet Finisher-Y1 with extension tray extended and Saddle unit drawn) 1,811 x 1,166 mm (with DADF-BA1 + Paper Deck Unit F1 + Booklet Finisher-Y1 with extension tray extended and Saddle unit drawn)
----------------------------------	---

Weight	With Platen Cover Y2: Approx. 75.0 kg including toner With Single Pass DADF-C1 : Approx. 87.9 kg including toner With DADF-BA1 : Approx. 81.4 kg including toner
---------------	--

PRINT SPECIFICATIONS

Print Speed	iR-ADV DX 4751i: Up to 51ppm (A4), Up to 37ppm (A4R), Up to 25ppm (A3), Up to 20 ppm (A5R) iR-ADV DX 4745i: Up to 45ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4735i: Up to 35ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4725i: Up to 25ppm (A4), Up to 17ppm (A4R), Up to 15ppm (A3), Up to 17ppm (A5R)
--------------------	--

Print Resolution (dpi)	1,200x 1,200
Page description languages	Standard: UFR II, PCL6, Optional: Adobe®PostScript®3™

Direct Print	Supported file types: TIFF, JPEG, PDF, EPS, and XPS
---------------------	---

Printing from mobile and cloud

Fonts	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese) , Barcode fonts*2 PS fonts: 136 Roman *1: Optional PCL International Font Set-A1 is required. *2: Optional Barcode Printing Kit-D1 is required.
--------------	---

Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
-----------------------	--

Operating System	UFR II: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Serve 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PCL: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019 PS: Windows® 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PPD: Windows® 7/8.1/10, Mac OS X (10.9 or later) McAfee Embedded Control Software As of July,2019.
-------------------------	---

Copy Speed	iR-ADV DX 4751i: Up to 51ppm (A4), Up to 37ppm (A4R), Up to 25ppm (A3), Up to 20 ppm (A5R) iR-ADV DX 4745i: Up to 45ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4735i: Up to 35ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4725i: Up to 25ppm (A4), Up to 17ppm (A4R), Up to 15ppm (A3), Up to 17ppm (A5R)
-------------------	---

First-Copy-Out Time (A4)	iR-ADV DX 4751i: Approx. 3.7 seconds or less iR-ADV DX 4745i: Approx. 3.8 seconds or less iR-ADV DX 4735i: Approx. 3.8 seconds or less iR-ADV DX 4725i: Approx. 5.2 seconds or less
---------------------------------	--

Copy resolution (dpi)	600 x 600
Multiple Copies	Up to 9,999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable zoom: 25% - 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%(1:1), 141%, 200%, 400%

Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Reserved copy, Copy Sample
----------------------	--

SCAN SPECIFICATIONS	
Selectable type	Single Pass DADF-C1* or DADF-BA1 [2-sided to 2-sided (Automatic with DADF)] * Detect Feeder Multi Sheet Feed is supported. DADF: Duplexing Automatic Document Feeder

Document Feeder Paper Capacity (80 gsm)	Single Pass DADF-C1: up to 200 sheets DADF-BA1: up to 100 sheets
Acceptable originals and weights	Platen: Sheet, Book, and 3-Dimensional objects Document Feeder media weight: Single Pass DADF-C1*: 1-sided scanning: 38 to 220 gsm 2-sided scanning: 38 to 220 gsm *An acceptable weights of A6R or smaller is 50 to 220gsm.

Supported media sizes	DADF-BA1 : 1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL) Platen: max. scanning size up to 297.0 x 431.8 mm Document Feeder media size: Single Pass DADF-C1: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R, Custom size: 70.0 x 139.7 mm to 304.8 x 431.8 mm
------------------------------	---

Scan Speed (ipm: BW/CL; A4)	DADF-BA1: 1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy) 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy) DADF-BA1: 1-sided Scanning: 70/70 (300 x 300 dpi, send), 51/51 (600 x 600 dpi, copy) 2-sided Scanning: 35/35 (300 x 300 dpi, send), 25.5/25.5 (600 x 600 dpi, copy)
------------------------------------	---



imageRUNNER ADVANCE DX 4735i

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX 4700 Series

Scan Resolution (dpi)	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600	Network Security	TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), Communication Line Separation (G3 FAX, USB Port, Advanced Space, Scan and Send -Virus Concerns for E-mail Reception)
Pull Scan Specifications	Color Network ScanGear2, For both TWAIN and WIA Supported OS: Windows 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server 2016	Device Security	Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), IEEE2600.2 (Common Criteria Certification) (TBD)
Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud (uniFLOW)	Device Management and Auditing	Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting
SEND SPECIFICATIONS		ENVIRONMENTAL SPECIFICATIONS	
Destination	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax	Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Address Book	LDAP (2,000)/Local(1,600)/Speed dial(200)	Power source	220-240V, 50-60Hz, 5.6A
Send resolution (dpi)	Push: up to 600 x 600 Pull: up to 600 x 600	Power consumption	Maximum: Approx. 1,500 W Copying (with DADF continuous scan): IR-ADV DX 4751i: 990 W ^{*1} IR-ADV DX 4745i: 975 W ^{*1} IR-ADV DX 4735i: 875 W ^{*1} IR-ADV DX 4725i: 653 W ^{*1}
Communication protocol	File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV E-mail/l-Fax: SMTP, POP3		Standby: Approx. 38 W ^{*1} Sleep mode: Approx. 0.9 W ^{*2} ^{*1} Reference value: measured one unit ^{*2} 0.9 sleep mode is not available in all circumstances due to certain settings.
File Format	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)		Typical Electricity Consumption (TEC)* : IR-ADV DX 4751i: 0.72 kWh IR-ADV DX 4745i: 0.63 kWh R-ADV DX 4735i: 0.53 kWh IR-ADV DX 4725i: 0.35 kWh ^{*As per USA Energy Star 3.0}
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages		Sound Power Level (LWA m³) Active (1-sided) IR-ADV DX 4751i: 6.7 B, Kv 0.3 B IR-ADV DX 4745i: 6.6 B, Kv 0.3 B IR-ADV DX 4735i: 6.5 B, Kv 0.3 B IR-ADV DX 4725i: 6.3 B, Kv 0.3 B ^{*Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)}
FAX SPECIFICATIONS		Noise levels	Sound Pressure (LpAm) Bystander's position: Active(BW) (1-sided): IR-ADV DX 4751i: 54 dB* IR-ADV DX 4745i: 51 dB* IR-ADV DX 4735i: 51 dB* IR-ADV DX 4725i: 50 dB* Stand-by IR-ADV DX 4751i: 21 dB* IR-ADV DX 4745i: 21 dB* IR-ADV DX 4735i: 20 dB* IR-ADV DX 4725i: 20 dB* ^{*Reference value: Measured only one unit with ISO7779, described with ISO9296 (2017)}
Maximum Number of Connection Lines	2		
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps		
Compression Method	MH, MR, MMR, JBIG		
Resolution (dpi)	400x400 (Ultra Fine), 200x400 (Super Fine), 200x200 (Fine), 200x100 (Normal)		
Sending/Receiving Size	Sending: A3, A4, A4R, A5 ^{*1} , A5R ^{*1} , B4, B5 ^{*2} , B5R ^{*1} Receiving: A3, A4, A4R, A5R, B4, B5, B5R ^{*1} Sent as A4 ^{*2} Sent as B4 short		
FAX memory	Up to 30,000 pages (2,000 jobs)		
Speed dials	Max. 200		
Group dials/destinations	Max. 199 dials		
Sequential broadcast	Max. 256 addresses		
Memory backup	Yes		
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log		
STORE SPECIFICATIONS		Standards	Blue Angel
Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 30,000 Pages (2,000 jobs) Stored	CONSUMABLES	
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows [®] 8.1/10 Concurrent Connections (Max.): SMB:64, WebDAV:3	Toner Cartridges	C-EXV 53 TONER BK C-EXV 53 TONER BK: 42,100 pages
Advanced Space available disc space	Standard:16 GB (With option: max. 480GB)	Toner	
Advanced Space Features	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore	(Estimated Yield @ 6% Coverage)	
SECURITY SPECIFICATIONS		SOFTWARE AND PRINTER MANAGEMENT	
Authentication and Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)	Tracking and reporting	For detailed information please visit our website https://www.canon-europe.com/business/
Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print [™]), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle [®] Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Box Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark) ^{*1} Requires uniFLOW Online / uniFLOW	Remote management tools	Universal Login Manager (ULM) uniFLOW Online Express[™] ^{*For more information, please refer to uniFLOW Online Express/uniFLOW Online Technical Datasheets}
		Scanning software	iW Management Console eMaintenance Content Delivery System
		Optimisation tools	Network ScanGear Canon Driver Configuration Tool NetSpot Device Installer
		Platform	MEAP (Multifunctional Embedded Application Platform)
		Document Administration	Kofax Power PDF (Optional)

imageRUNNER ADVANCE DX 4735i

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX 4700 Series

PAPER SUPPLY OPTIONS

Cassette Feeding Unit-AN1

Paper Capacity: 550 sheets x 2 (80 gsm)
 Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched
 Paper Size: A3, A4, A4R, A5R, B4, B5R, B5
 Custom size: 139.7 x 182.0mm to 297.0 x 390.0 mm
 Paper Weight: 60 to 220 gsm
 Power Source: From the Main Unit
 Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit)
 Weight: Approx. 23.5 kg

High Capacity Cassette Feeding Unit-B1

Paper Capacity: 2,450 sheets (80 gsm)
 Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched
 Paper Size: A4
 Paper Weight: 60 to 220 gsm
 Power Source: From the Main Unit
 Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit)
 Weight: Approx. 28.0 kg

Paper Deck Unit-F1

Tray Capacity: 2,700 sheets (80 gsm)
 Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched
 Paper Size: A4, B5
 Paper Weight: 60 to 128 gsm
 Power Source: From the Main Unit
 Dimensions (W x D x H): 344 x 630 x 440 mm (attached to the main unit)
 Weight: Approx. 31.0 kg

OUTPUT OPTIONS*

Inner 2Way Tray-L1

*Paper capacity may vary with different of paper type/size.

Tray Capacity (with 80 gsm paper)
 Upper tray: A4, A5, A5R, A6R, B5, 100 sheets
 A3, A4R, B4, B5R: 50 Sheets
 Lower tray: A4, B5: 250 sheets
 A3, A4R, A5, A5R, A6R, B4, B5R: 100 sheets
 Paper Weight: 52 to 220 gsm
 Dimensions (W x D x H): 426 x 413 x 109 mm
 Weight: 0.6 kg

Inner Finisher-J1

Tray Capacity (with 80 gsm paper)
 Upper Tray: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 45 sheets
 Lower Tray: A4, A5R, B5: approx. 500 sheets,
 A3, A4R, B4, B5R: approx. 250 sheets
 Envelope: 10 sheets
 Paper Weight: 52 to 220 gsm
 Staple Position: Corner, Double
 Staple Capacity:
 A4, B5: 50 sheets (52 to 90 gsm)
 A3, A4R, B4: 30 sheets (52 to 90 gsm)
 Eco Staple:
 A3, A4, B4, B5: 5 sheets (52 to 64 gsm)
 4 sheets (65 to 81.4 gsm)
 3 sheets (81.5 to 105 gsm)
 Staple On Demand: approx. 40 sheets (80 gsm)
 Dimensions (W x D x H): 604 x 525 x 205 mm (when the extension tray is extended)
 Weight: Approx. 7.3 kg

Staple Finisher-Y1

(Requires Buffer Pass Unit-N1)
 Tray Capacity (with 80 gsm paper):
 Upper Tray: A4, A5, A5R, A6R, B5: 250 sheets,
 A3, A4R, B4, B5R: 125 sheets,
 Lower Tray: A4, A5, A5R, B5: 3,000 sheets,
 A3, A4R, B4, B5R: 1,500 sheets,
 A6R: up to 250 sheets
 Envelope: No.10 COM10, DL, ISO-C5: 100 sheets,
 Monarch: 30 sheets
 Paper Weight: 52 to 220 gsm
 Staple Position: Corner, Double
 Staple Capacity:
 A4, B5: 50 sheets (52 to 90 gsm)
 A3, A4R, B4: 30 sheets (52 to 90 gsm)
 Eco Staple:
 A3, A4: 5 sheets (52 to 64 gsm)
 4 sheets (65 to 81.4 gsm)
 3 sheets (82 to 105 gsm)
 Staple On Demand: 50 sheets (52 to 90 gsm)
 Power Supply: from the main unit
 Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended)
 Weight: Approx. 31 kg

Booklet Finisher-Y1

(Requires Buffer Pass Unit-N1)
 (Includes the above Staple Finisher-Y1 basic staple specifications)
 Saddle Stitch paper size: A3, A4R, B4
 Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet)
 Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm)
 Power Supply: from the main unit
 Dimensions (W x D x H): 637 mm x 623 mm x 1,142 mm (when the extension tray is extended)
 Weight: Approx. 57 kg

Inner 2/F4 Hole Puncher-C1

(Requires the Inner Finisher-J1)
 Two or Four Holes
 Acceptable Punch Paper Weight: 52 to 220 gsm
 Acceptable Punch Paper Size:
 Two holes A3, A4, A4R, B4, B5, B5R
 Four holes A3, A4
 Power Source: from the Finisher

Inner S4 Hole Puncher-C1

(Requires the Inner Finisher-J1)
 Four Holes
 Acceptable Punch Paper Weight: 52 to 220 gsm
 Acceptable Punch Paper Size: Four holes A3, A4, A4R, B4, B5, B5R
 Power Source: from the Finisher

2/4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)
 Two or Four Holes
 Acceptable Punch Paper Weight: 52 to 220 gsm
 Acceptable Punch Paper Size:
 Two holes A3, A4, A4R, A5, B4, B5, B5R
 Four holes A3, A4
 Power Source: from the Finisher

4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)
 Four Holes
 Acceptable Punch Paper Weight: 52 to 220 gsm
 Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R
 Power Source: from the Finisher

HARDWARE ACCESSORIES

Card Readers

Various card readers available e.g. MiCard Plus.
 Please contact local Canon Office for more details.
 Copy Card Reader-F1
 Copy Card Reader Attachment-B7

Others

Platen Cover-Y2
 Utility Tray-B1
 Envelope Feeder Attachment-D1
 Numeric Keypad-A1

SECURITY OPTIONS

Data Security

HDD Mirroring Kit-J1
 2.5inch/250GB HDD-N1
 2.5inch/1TB HDD-P1

SYSTEM AND CONTROLLER OPTIONS

Print Accessories

PCL International Font Set-A1
 PS Printer Kit-BG1

Barcode Printing

Barcode Printing Kit-D1

System Accessories

Copy Control Interface Kit-A1
 Serial Interface Kit-K3
 Connection Kit-A2 for Bluetooth LE
 NFC Kit-E1

Fax Accessories

Super G3 FAX Board-BF1
 Super G3 2nd Line Fax Board-BF1
 Remote Fax Kit-A1
 IP FAX Expansion Kit-B1

OTHER OPTIONS

Accessibility Accessories

ADF Access Handle-A1
 Voice Guidance Kit-G1
 Voice Operation Kit-D1
 Staple-P1
 Staple Cartridge-Y1

Software & Solutions



Certifications and compatibility



Canon Ireland
 3006 Lake Drive
 Citywest, Saggart
 Co. Dublin, Ireland
 Telephone No: 01 2052400
 Facsimile No: 01 2052525
 canon.ie

Canon (UK) Ltd
 5 The Square
 Stockley Park
 Uxbridge
 UB11 1ET
 Tel: 01895 648 000
 www.canon.co.uk

Canon Inc.
 canon.com
 Canon Europe
 canon-europe.com
 English edition
 © Canon Europa N.V., 2020