

# imageRUNNER ADVANCE DX C5700 Series

## STREAMLINE BUSINESS EFFICIENCY WITH SMART, COLOUR A3 MULTIFUNCTION DEVICES




Canon uniFLOW Online  
Outstanding Cloud Output Management Solution



New to the Line

### MAIN CONFIGURATION OPTIONS

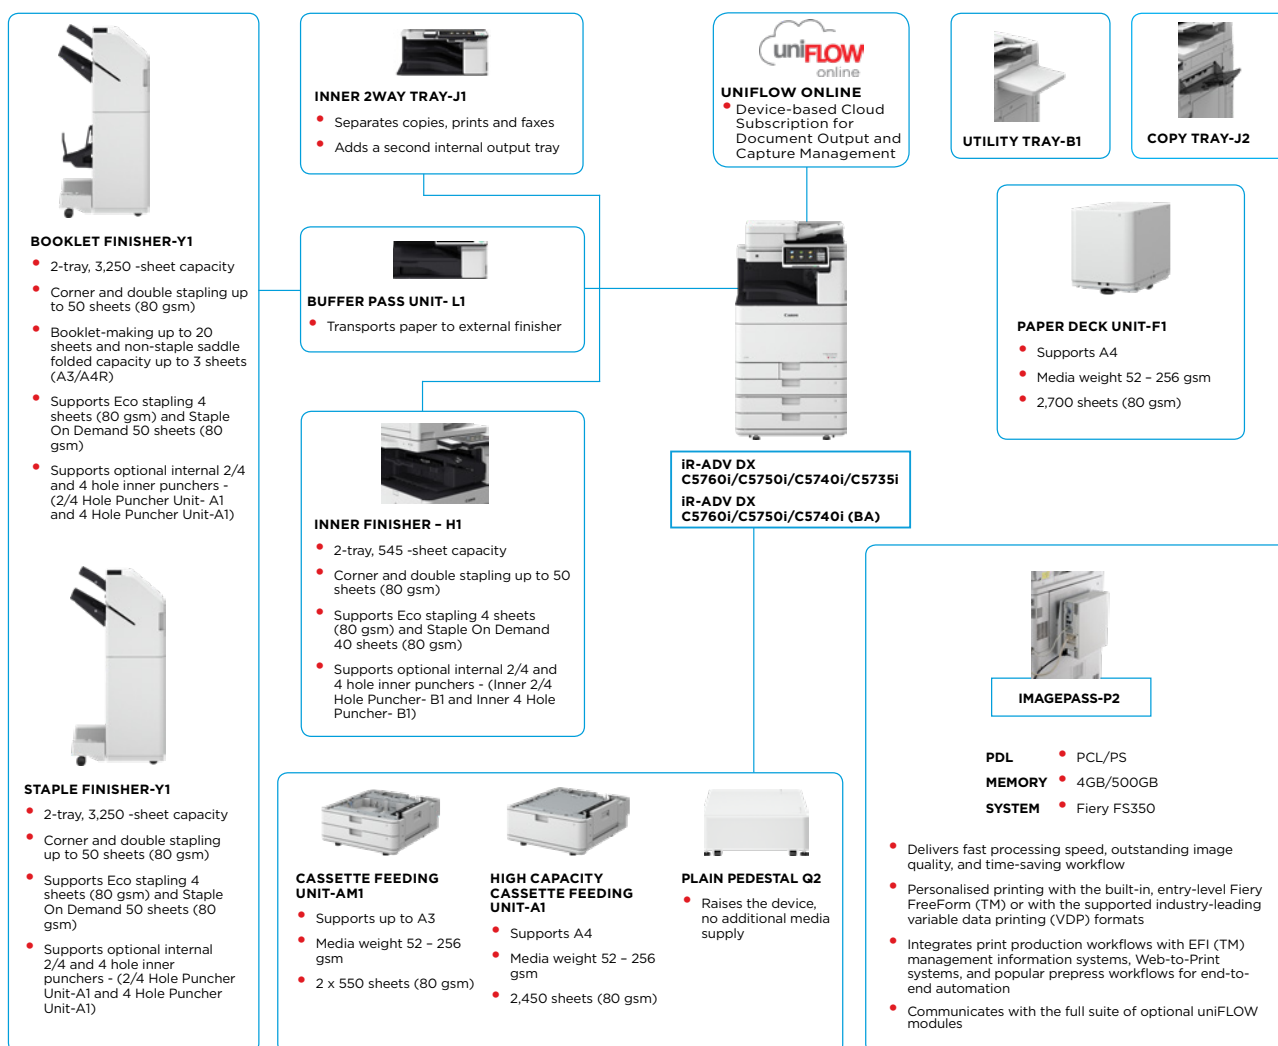

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire iR ADVANCE DX portfolio.

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE DX C5700 Series

<b>MAIN UNIT</b>		<b>Direct Print</b>	Supported file types: PDF, EPS, TIFF/JPEG, and XPS
<b>Machine type</b>	A3 Color Laser Multifunctional	<b>Printing from mobile and cloud</b>	AirPrint, Mopria, Google Cloud Print, Canon PRINT Business and uniFLOW Online
<b>Core functions</b>	Print, Copy, Scan, Send, Store and Optional Fax		A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
<b>Processor</b>	1.75GHz Dual Core Processor		PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2
<b>Control Panel</b>	10.1" TFT LCD WSVGA Color Touch panel	<b>Fonts</b>	*1 Optional PCL International Font Set-A1 is required. *2 Optional Barcode Printing Kit-D1 is required.
<b>Memory</b>	Standard: 4.0GB RAM		Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
<b>Hard Disk drive</b>	Standard*: 320GB (available disk space: 250GB), Optional: 250GB, 1TB *A different initial HDD may be used.	<b>Print Features</b>	Operating System
<b>Mirroring Hard Disk Drive</b>	Optional		UFR II: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later)
<b>Interface Connection</b>	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n); Optional: NFC, Bluetooth Low Energy OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Serial Interface, Copy Control Interface		PCL: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019 PS: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later) PPD: Windows® 7/8.1/10, Mac OS X(10.9 or later) McAfee Embedded Control Software As of Feb 2020
<b>Paper Supply Capacity (A4, 80gsm)</b>	Standard: 1,200 sheets 100-sheet multi-purpose tray x 1 550-sheet cassettes x 2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-A1 + Paper Deck Unit-F1)	<b>Operating System</b>	
<b>Paper output capacity (A4, 80gsm)</b>	Standard: 250 sheets Maximum: 3,450 Sheets (with Staple Finisher-Y1 or Booklet Finisher-Y1 and Copy Tray-J2)		
<b>Finishing capabilities</b>	Standard: Collate, Group With Options: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand	<b>COPY SPECIFICATIONS</b>	
<b>Supported Media Types</b>	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Coated, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Tab, Envelope  Paper Cassette (Upper/Lower): Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* *Envelope Feeder Attachment (standard) is required.	<b>Copy Speed (BW/CL)</b>	iR-ADV DX C5760i up to 60 ppm (A4, A5, A5R, A6R), up to 32 ppm (A3), up to 36 ppm (A4R)  iR-ADV DX C5750i up to 50 ppm (A4, A5, A5R, A6R), up to 27 ppm (A3), up to 30 ppm (A4R)  iR-ADV DX C5740i up to 40 ppm (A4, A5, A5R, A6R), up to 22 ppm (A3), up to 24 ppm (A4R)  iR-ADV DX C5735i up to 35 ppm (A4, A5, A5R, A6R), up to 18 ppm (A3), up to 23 ppm (A4R)
<b>Supported Media Sizes</b>	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Free Size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Envelopes: COM 10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 98.4 mm to 320.0 x 457.2 mm Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 98.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: COM10 No.10, DL, ISO-C5 Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 182.0 mm to 304.8 x 457.2 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5	<b>First-Copy-Out Time (A4, BW/CL)</b>	iR-ADV DX C5760i: Approx. 2.9/4.5 seconds or less  iR-ADV DX C5750i: Approx. 3.5/5.2 seconds or less  iR-ADV DX C5740i: Approx. 4.1/6.1 seconds or less  iR-ADV C5735i: Approx. 4.9/7.4 seconds or less
<b>Supported media weights</b>	Multi-purpose tray: 52 to 300 gsm Paper Cassette (Upper/Lower): 52 to 256 gsm Duplex: 52 to 220 gsm	<b>Copy resolution (dpi)</b>	600 x 600
<b>Warm-up Time</b>	Quick Startup Mode: 4 Seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display.  From Sleep Mode: 10 Seconds or Less  From Power On: 10 Seconds or less* *Time from device power-on, until copy ready (not print reservation).	<b>Multiple Copies</b>	Up to 999 copies
<b>Dimensions (W x D x H)</b>	iR-ADV DX C5760i/C5750i/C5740i/C5735i: 620 x 722 x 937 mm iR-ADV DX C5760i/C5750i/C5740i (BA models): 620 x 860 x 937 mm	<b>Copy Density</b>	Automatic or Manual (9 Levels)
<b>Installation Space(W x D)</b>	iR-ADV DX C5760i/C5750i/C5740i/C5735i: Basic: 1,083 x 1,162 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 1,866 x 1,162 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open)  iR-ADV DX C5760i/C5750i/C5740i (BA models): Basic: 1,083 x 1,300 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 1,866 x 1,300 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open)	<b>Magnification</b>	Variable zoom: 25% to 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%(1:1), 141%, 200%, 400%
<b>Weight</b>	iR-ADV DX C5760i/C5750i/C5740i/C5735i: Approx. 143 kg including toner [iR-ADV DX C5760i/C5750i/C5740i (BA models): Approx. 145 kg including toner]	<b>Copy Features</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
<b>PRINT SPECIFICATIONS</b>		<b>SCAN SPECIFICATIONS</b>	
<b>Print Speed (BW/CL)</b>	iR-ADV DX C5760i 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60/5 ppm (A5R), 60/5 ppm (A6R)  iR-ADV DX C5750i 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50/4 ppm (A5R), 50/4 ppm (A6R)  iR-ADV DX C5740i 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40/4 ppm (A5R), 40/4 ppm (A6R)  iR-ADV DX C5735i 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35/4 ppm (A5R), 35/4 ppm (A6R)	<b>Type</b>	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Detect Feeder Multi Sheet Feed is supported. up to 200 Sheets
<b>Print Resolution (dpi)</b>	600 x 600, 1,200 x 1,200	<b>Document Feeder Paper Capacity (80 gsm)</b>	Platen: Sheet, Book, and 3-Dimensional Objects Document Feeder media weight: 1-sided scanning: 38 to 220 gsm (BW, CL) 2-sided scanning: 38 to 220 gsm (BW, CL) *An acceptable weights of A6R or smaller is 50 to 220gsm.
<b>Page description languages</b>	Standard: UFR II, PCL6, Adobe® PostScript®3™	<b>Acceptable Originals and weights</b>	Platen scanning size: up to 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 70.0 x 139.7 mm to 304.8 x 431.8 mm
		<b>Supported media sizes</b>	1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy), 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy)
		<b>Scan Speed (ipm: BW/CL; A4)</b>	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
		<b>Scan Resolution (dpi)</b>	Color Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server 2016
		<b>Pull Scan Specifications</b>	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online)
		<b>Scan Method</b>	

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE DX C5700 Series

## SEND SPECIFICATIONS

### Destination

Standard: E-mail/Internet FAX (SMTP) SMB3.0 FTP WebDAV Mail Box  
Optional: Super G3 FAX, IP Fax

### Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

### Send resolution (dpi)

Push: up to 600 x 600 Pull: up to 600 x 600

### Communication protocol

File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV  
E-mail/I-Fax: SMTP, POP3

### File Format

Standard: TIFF, JPEG, PDF(Limited Color, Compact, Searchable, Apply policy, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS(Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)

### Universal Send Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages

## FAX SPECIFICATIONS

### Maximum Number of Connection Lines

(Optional)  
2 (2nd line optional)

### Modem Speed

Super G3: 33.6 kbps  
G3: 14.4 kbps

### Compression Method

MH, MR, MMR, JBIG

### Resolution (dpi)

400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)

### Sending/Receiving Size

Sending: A3, A4, A4R, A5<sup>1</sup>, A5R<sup>1</sup>, B4, B5<sup>2</sup>, B5R<sup>1</sup>  
Receiving: A3, B4, A4, A4R, A5R, B5, B5R  
<sup>1</sup>Sent as A4  
<sup>2</sup>Sent as B4 short

### FAX memory

Up to 30,000 pages (2,000 jobs)

### Speed dials

Max. 200

### Group dials/destinations

Max. 199 dials

### Sequential broadcast

Max. 256 addresses

### Memory backup

Yes

### Fax Features

Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

## STORE SPECIFICATIONS

### Mail Box (Number supported)

1100 User Inboxes,  
1 Memory RX Inbox,  
50 Confidential Fax Inboxes  
Maximum 10,000 Pages (2,000 jobs) Stored

### Advanced Space

Communication Protocol: SMB or WebDAV  
Supported Client PC: Windows<sup>®</sup> 8.1/10  
Concurrent Connections (Max.): SMB:64, WebDAV:3

### Advanced Space available disc space

Standard:16 GB (With option: max. 480GB)

### Advanced Space Features:

Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

## SECURITY SPECIFICATIONS

### Authentication and Access Control

User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)

### Document Security

Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print<sup>®</sup>), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle<sup>®</sup> Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME support), Document Tracking (Secure Watermark)  
<sup>®</sup> Requires uniFLOW Online / uniFLOW

### Network Security

TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Box in the MFP, Scan and Send -Virus Concerns for E-mail Reception

### Device Security

Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), Comply IEEE2600.2 (Common Criteria Certification) (in evaluation)

## Device Management and Auditing

Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

## ENVIRONMENTAL SPECIFICATIONS

### Operating Environment

Temperature: 10 to 30 °C  
Humidity: 20 to 80 % RH (Relative Humidity)

### Power source

220-240 V, 50/60 Hz, 6 A

### Power consumption

Maximum: Approx. 1,800 W  
Copying (with DADF continuous scan): Approx. 1,015 W<sup>1</sup>  
Standby: Approx. 62.4 W <sup>1</sup>  
Sleep mode: Approx. 0.8 W<sup>2</sup>

<sup>1</sup> Reference value: measured one unit

<sup>2</sup> 0.8 W is not available in all circumstances due to certain settings.

Typical Electricity Consumption (TEC)<sup>\*</sup> :

iR-ADV DX C5760i: 0.86 kWh (BA model: 0.84 kWh)

iR-ADV DX C5750i: 0.71 kWh (BA model: 0.68 kWh)

iR-ADV DX C5740i: 0.59 kWh (BA model: 0.58 kWh)

iR-ADV DX C5735i: 0.45 kWh

<sup>\*</sup> As per USA Energy Star 3.0

### Noise levels (BW/CL)

Sound Power Level (LWA,m)

Active (BW) (1-sided)

iR-ADV DX C5760i: 6.6 B\*, Kv 0.3 B\*

(BA model: 6.7 B\*, Kv 0.3 B\*)

iR-ADV DX C5750i: 6.5 B\*, Kv 0.3 B\*

(BA model: 6.5 B\*, Kv 0.3 B\*)

iR-ADV DX C5740i: 6.4 B\*, Kv 0.3 B\*

(BA model: 6.5 B\*, Kv 0.3 B\*)

iR-ADV DX C5735i: 6.3 B\*, Kv 0.3 B\*

<sup>\*</sup>Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

Sound Pressure (LpAm)

Bystander's position:

Active (BW/CL) (1-sided)

iR-ADV DX C5760i: 54 dB<sup>1</sup>/54 dB\*

(BA model: 54 dB<sup>1</sup>/55 dB\*)

iR-ADV DX C5750i: 52 dB<sup>1</sup>/53 dB\*

(BA model: 52 dB<sup>1</sup>/53 dB\*)

iR-ADV DX C5740i: 52 dB<sup>1</sup>/52 dB\*

(BA model: 53 dB<sup>1</sup>/53 dB\*)

iR-ADV DX C5735i: 51 dB<sup>1</sup>/51 dB\*

Stand-by

iR-ADV DX C5760i/C5750i/C5735i: 26 dB\*

iR-ADV DX C5740i: 27 dB\*

iR-ADV DX C5760i/C5750i/C5740i (BA model): 24 dB\*

<sup>\*</sup> Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

Blue Angel (only C5735i & BA Models)

## Standards

## CONSUMABLES

### Toner Cartridges

C-EXV 51 Toner BK/C/M/Y

C-EXV 51L Toner C/M/Y

### Toner Yield (Estimated @ 5% Coverage)

C-EXV 51 Toner BK: 69,000 pages

C-EXV 51 Toner C/M/Y: 60,000 pages

C-EXV 51L Toner C/M/Y: 26,000 pages

## Consumables

Staple-P1

Staple Cartridge-Y1

## SOFTWARE AND PRINTER MANAGEMENT

### Tracking and reporting

For detailed information please visit our website

<https://www.canon-europe.com/business/>

Universal Login Manager (ULM)

uniFLOW Online Express<sup>\*</sup>

<sup>\*</sup> For more information, please refer to

[uniFLOW Online Express](#)

[uniFLOW Online](#)

### Remote management tools

iW Management Console

eMaintenance

Content Delivery System

### Scanning software

Network ScanGear

### Platform

MEAP (Multifunctional Embedded Application Platform)

### Document Administration

Kofax Power PDF (Optional)

## FIERY PRINT CONTROLLER SPECIFICATIONS (EMBEDDED)

### Optional/Standard

For full specifications & options, please visit the Canon website

### Name

Optional on all models

### Print Resolution (dpi)

imagePASS-P2 V1.1 (Embedded)

### Page Description Language(s)

600 x 600 : 1200 x 1200

### Memory

Adobe PS3, PCL6

### Hard Disk Drive

4GB (1 x 4GB)

### Processor Speed

500 GB SATA

### System

Intel Pentium G4400 (3.3 GHz)

### System

FS350

## PAPER SUPPLY OPTIONS

### Cassette Feeding Unit-AM1

Paper Capacity: 2 x 550 sheets (80 gsm)

Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond,

Transparency, Pre-punched, Letterhead

Paper Size:

A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R

Custom size: 98.0 x 182.0 mm to 304.8 x 457.2 mm

Paper Weight: 52 to 256 gsm

Power Source: From the Main Unit

Dimensions (W x D x H): 620 x 700 x 251 mm

(attached to the main unit)

Weight: Approx. 22.5 kg



# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE DX C5700 Series

<b>High Capacity Cassette Feeding Unit-A1</b>	<p>Paper Capacity: 2,450 sheets (80 gsm)                  Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Pre-punched, Letterhead                  Paper Size: A4                  Paper Weight: 52 to 256 gsm                  Power Source: From the Main Unit                  Dimensions (W x D x H): 620 x 700 x 251 mm (attached to the main unit)                  Weight: Approx. 30.0 kg</p>	<b>Booklet Finisher-Y1</b>	<p>(Requires Buffer Pass Unit-L1)                  (Includes the above Staple Finisher-Y1 basic staple specifications.)                  Saddle Stitch paper size: A3, A4R, B4                  Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet 52 to 256 gsm)                  Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm)                  Power supply: From the main unit                  Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended)                  Weight: Approx. 57 kg</p>
<b>Paper Deck Unit-F1</b>	<p>Paper Capacity: 2,700 sheets (80 gsm)                  Paper Type: Thin, Plain, Color, Recycled, Heavy, Pre-punched                  Paper Size: A4, B5                  Paper Weight: 52 to 256 gsm                  Power Source: From the Main Unit                  Dimensions (W x D x H): 344 x 630 x 440 mm (attached to the main unit)                  Weight: Approx. 31 kg</p>	<b>Inner 2/4 Hole Puncher-B1</b>	<p>(Requires the Inner Finisher-H1)                  Two or Four Holes                  Acceptable Punch Paper Weight: 52 to 300 gsm                  Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R                  Four holes: A3, A4                  Power Source: From the finisher</p>
<b>OUTPUT OPTIONS*</b>	*Paper capacity may vary with different paper type/size.	<b>Inner 4 Hole Puncher-B1</b>	<p>(Requires the Inner Finisher-H1)                  Four Holes                  Acceptable Punch Paper Weight: 52 to 300 gsm                  Acceptable Punch Paper Size:                  Four holes: A3, A4, A4R, A5, B4, B5, B5R                  Power Source: From the finisher</p>
<b>Inner 2way Tray-J1</b>	<p>Tray Capacity (80 gsm)                  Upper tray: A4, A5, A5R, A6R, B5: 100 sheets                  SRA3, A3, A4R, B4, B5R: 50 sheets                  Lower tray (standard tray): A4, A5, A5R, A6R, B5: 250 sheets                  SRA3, A3, A4R, B4, B5R: 100 sheets                  Paper Weight: 52 to 300 gsm                  Dimensions (W x D x H): 420 x 407 x 76 mm                  Weight: Approx. 0.7 kg</p>	<b>2/4 Hole Puncher Unit-A1</b>	<p>(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)                  Two or Four Holes                  Acceptable Punch Paper Weight: 52 to 300 gsm                  Acceptable Punch Paper Size:                  Two holes: A3, A4, A4R, A5, B4, B5, B5R                  Four holes: A3, A4                  Power Source: From the finisher</p>
<b>Copy Tray-J2</b>	<p>Capacity (80gsm):                  A4, A5, A5R, A6R, B5: 100 sheets                  SRA3, A3, A4R, B4, B5R: 75 sheets                  Dimensions (W x D x H): 442 x 373 x 176 mm (attached to the main unit, when the extension tray is extended)                  Weight: 0.5 kg</p>	<b>4 Hole Puncher Unit-A1</b>	<p>(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)                  Four Holes                  Acceptable Punch Paper Weight: 52 to 300 gsm                  Acceptable Punch Paper Size:                  Four holes A3, A4, A4R, A5, B4, B5, B5R                  Power Source: From the finisher</p>
<b>Inner Finisher-H1</b>	<p>Tray Capacity (80gsm):                  Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R : 45 sheets                  Lower Tray: A4, A5, A5R, B5: 500 sheets,                  SRA3, A3, A4R, B4, B5R, : 250 sheets,                  A6R: 30 sheets                  Envelope: 10 sheets</p> <p>Paper Weight: 52 to 300 gsm                  Staple Position: Corner, Double                  Staple Capacity:                  A4, B5: 50 sheets (52 to 90 gsm)                  A3, A4R, B4: 30 sheets (52 to 90 gsm)</p> <p>Eco Staple:                  A3, A4, B4, B5: 5 sheets (52 to 64 gsm)                  4 sheets (65 to 81.4 gsm)                  3 sheets (82 to 105 gsm)                  Staple On Demand: 40 sheets (80 gsm)                  Power supply: From the main unit                  Dimensions (W x D x H): 585 x 525 x 225 mm (when the extension tray is extended)                  Weight: Approx. 8.6 kg</p>	<b>HARDWARE ACCESSORIES</b>	
<b>Staple Finisher-Y1</b>	<p>(Requires Buffer Pass Unit-L1)                  Tray Capacity (80gsm):                  Upper Tray: A4, A5, A5R, A6R, B5: 250 sheets,                  SRA3, A3, A4R, B4, B5R: 125 sheets</p> <p>Lower Tray: A4, A5, A5R, B5: 3,000 sheets                  SRA3, A3, A4R, B4, B5R: 1,500 sheets,                  A6R: 250 sheets                  Envelopes: Monarch: 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets</p> <p>Paper Weight:                  Upper Tray 52 to 256 gsm,                  Lower Tray 52 to 300 gsm                  Staple Position: Corner, Double                  Staple Capacity:                  A4, B5: 50 sheets (52 to 90 gsm)                  A3, A4R, B4: 30 sheets (52 to 90 gsm)                  Eco Staple:                  A3, A4: 5 sheets (52 to 64 gsm)                  4 sheets (65 to 81.4 gsm)                  3 sheets (82 to 105 gsm)                  Staple On Demand: 50 sheets (52 to 90 gsm)                  Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended)                  Weight: Approx. 31 kg</p>	<b>Card Readers</b>	<p>Various card readers available e.g. MiCard Plus. Please contact local Canon Office for more details.                  Copy Card Reader-F1                  Copy Card Reader Attachment-B7</p>
		<b>Others</b>	<p>Tab Feeding Attachment-F1                  Utility Tray-B1                  Buffer Pass Unit-L1                  Numeric Keypad-A1</p>
		<b>SECURITY OPTIONS</b>	
		<b>Data Security</b>	<p>HDD Mirroring Kit-J1                  2.5inch/250GB HDD-N1                  2.5inch/1TB HDD-P1</p>
		<b>SYSTEM AND CONTROLLER OPTIONS</b>	
		<b>Print Accessories</b>	<p>PCL International Font Set-A1                  Barcode Printing Kit-D1                  imagePASS-P2 V1.1</p>
		<b>Barcode Printing</b>	
		<b>EFI-Fiery Based Controller System Accessories</b>	<p>Copy Control Interface Kit-A1                  Serial Interface Kit-K3                  Connection Kit-A2 for Bluetooth LE                  NFC Kit-E1</p>
		<b>Fax Accessories</b>	<p>Super G3 FAX Board-AS1                  Super G3 2nd Line Fax Board-AS1                  Remote Fax Kit-A1                  IP FAX Expansion Kit-B1</p>
		<b>OTHER OPTIONS</b>	
		<b>Accessibility Accessories</b>	<p>ADF Access Handle-A1                  Voice Guidance Kit-G1                  Voice Operation Kit-D1</p>

## Software & Solutions



## Certifications and compatibility



**Canon Ireland**  
 3006 Lake Drive  
 Citywest, Saggart  
 Co. Dublin, Ireland  
 Telephone No: 01 2052400  
 Facsimile No: 01 2052525  
 canon.ie

**Canon (UK) Ltd**  
 5 The Square  
 Stockley Park  
 Uxbridge  
 UB11 1ET  
 Tel: 01895 648 000  
 www.canon.co.uk

**Canon Inc.**  
 canon.com  
**Canon Europe**  
 canon-europe.com  
 English edition  
 © Canon Europa N.V., 2020

